

# Dry Compressing Vacuum Pumps

DIVAC

Diaphragm Vacuum Pumps

SCROLLVAC

Scroll Vacuum Pumps

ECODRY plus

Roots Vacuum Pumps

LEYVAC / SCREWLINE

Screw Vacuum Pumps

DRYVAC

Screw Vacuum Pumps

220.00.02

Excerpt from the Leybold Full Line Catalog 2016

Catalog Part Dry Compressing Vacuum Pumps

Edition: Fall 2016

# Contents

## Dry Compressing Vacuum Pumps

### Global Versions

#### Diaphragm Vacuum Pumps **DIVAC** . . . . . 4

##### General

DIVAC Program Overview. . . . . 4

The customized Diaphragm Pump and the Accessories recommended for your Applications . . . . . 5

Modular Diaphragm Pump System for the Chemical Laboratory . . . . . 5

##### Products

Diaphragm Vacuum Pumps for the Chemical Laboratory . . . . . 6

Dual-Stage Diaphragm Vacuum Pumps

DIVAC 0.6 L, 1.2 L, 2.2 L . . . . . 6

Three-Stage Diaphragm Vacuum Pumps

DIVAC 1.4 HV3C . . . . . 8

Dry Compressing Backing Pumps for Turbomolecular Pumps . . . . . 10

DIVAC 0.8 T and 0.8 LT . . . . . 12

DIVAC 1.4 HV3 and 3.8 HV3. . . . . 14

DIVAC 4.8 VT . . . . . 16

#### Scroll Vacuum Pumps **SCROLLVAC** . . . . . 18

##### General

Applications and Accessories for SCROLLVAC Pumps . . . . . 18

##### Products

Oil-free Scroll Vacuum Pumps SCROLLVAC SC 5 D to SC 60 D. . . . . 19

#### Roots Vacuum Pumps **ECODRY plus**. . . . . 24

##### General

Applications for ECODRY plus Pumps . . . . . 24

##### Products

ECODRY 40 plus, ECODRY 65 plus . . . . . 25

## **Screw Vacuum Pumps LEYVAC . . . . . 29**

### **General**

Applications for LEYVAC Pumps . . . . . 29

### **Products**

LEYVAC LV 80 to LV 140 C . . . . . 30

## **Screw Vacuum Pumps SCREWLINE. . . . . 35**

### **General**

Applications for SCREWLINE Pumps . . . . . 35

### **Products**

SCREWLINE SP 250 to SP 630 (F) . . . . . 36

## **Screw Vacuum Pumps DRYVAC . . . . . 46**

### **General**

Applications for DRYVAC Pumps . . . . . 46

Oil for DRYVAC pumps, for different fields of application . . . . . 47

Oil for DRYVAC pumps, for different pump types . . . . . 48

### **Products**

DRYVAC DV 450 to DVR 5000 C-i. . . . . 49

## DIVAC Program Overview

This range of vacuum pumps was developed especially for laboratory operations and as backing pumps for (wide range) turbomolecular pumps. It satisfies the highest expectations in terms of precision, reliability and ease of use.

The DIVAC line of vacuum pumps is the logical continuation of diaphragm pump technology which has proven its quality in decades of service.

### Laboratory Pumps

Through the laboratory pumps and the three different pumping speeds available for the same base pressure and through the modular design, the optimum pump system can be implemented for every application.

DIVAC L diaphragm pumps are suited for almost all requirements in the chemistry lab. They are basically corrosion and solvent resistant since their parts in contact with the pumped medium are made of PTFE (Teflon), FFPM (Kalrez) and PVDF (Solef).

### Backing Pumps

The DIVAC T range of diaphragm pumps comprises backing pumps which are used in all applications requiring an especially low base pressure while having to maintain an oil-free vacuum.

The DIVAC T pumps have been specially developed as backing pumps for wide range high vacuum turbomolecular pumps. They meet the requirements for a dry vacuum and a long service life.

DIVAC T pumps may be used both free-standing and integrated in applications or certain devices, and for this reason they are used in the areas of mass spectrometry, analytical and in general applications.

### Application Examples

#### Laboratory Pumps

- Vacuum filtration
- Vacuum distillation
- Vacuum drying
- To extract and transfer gases
- On rotary evaporators
- Gel drying

#### Backing Pumps

- Backing pump for wide range turbomolecular pumps
- Mass spectrometry
- Medicine technology
- Analytical technology
- General rough and medium vacuum applications

# The customized Diaphragm Pump and the Accessories recommended for your Applications

Modular diaphragm pump system	Evacuating small devices (e.g. desiccator)	Sublimation	Analysis preparation	Filtration	Distillation	Drying in the drying cabinet	Drying cabinets (2 cabinets with 1 pump)	Rotary evaporator	Backing pumps for wide range turbomolecular pumps	Mass spectrometry	Medical technology	Analytical technology	General applications in the rough and medium vacuum range
<b>Application</b>													
DIVAC 0.6 L	■	■	■	■	■								■
DIVAC 1.2 L	■	■	■	■	■		■						■
DIVAC 2.2 L	■	■	■	■	■	■	■	■					■
DIVAC 1.4 HV3C	■	■	■	■	■	■	■	■	■	■	■	■	■
DIVAC 0.8 T									■	■	■	■	■
DIVAC 0.8 TL									■	■	■	■	■
DIVAC 1.4 HV3									■	■	■	■	■
DIVAC 3.8 HV3									■	■	■	■	■
DIVAC 4.8 VT									■	■	■	■	■

## Modular Diaphragm Pump System for the Chemical Laboratory

### Advantages to the User


- Low base vacuum of 8 mbar (6 Torr) for two-stage and 2 mbar (1.5 Torr) for three-stage DIVAC
- All parts of the pump head in contact with the gas are resistant against aggressive media through the use of PTFE (Teflon), FFPM (Kalrez) and PVDF (Solef)
- Dry compressing, oil-free
- Water vapor tolerance
- Low maintenance costs and long service intervals through the use of high-quality components which are well-proven
- Simple maintenance by staff of the customer
- Low noise operation
- Portable, compact, small footprint
- Can be operated in any orientation
- Overheat protection for the vacuum pump by means of a thermal fuse
- Available in four pumping speed categories

# Products

## Diaphragm Vacuum Pumps for the Chemical Laboratory

### Dual-Stage Diaphragm Vacuum Pumps

#### DIVAC 0.6 L, 1.2 L, 2.2 L

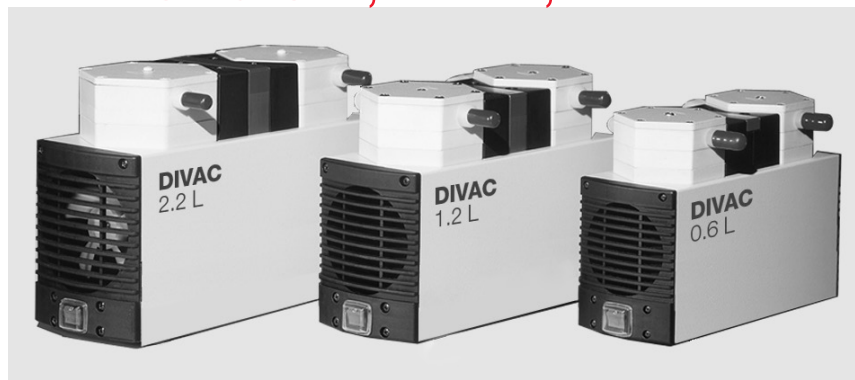


#### Typical Applications


Vacuum generation for

- Rotary evaporators
- Drying chambers
- Filtration units
- Distillation configurations
- Gel dryers


Dual-stage diaphragm vacuum pumps DIVAC 0.6 L, 1.2 L, 2.2 L

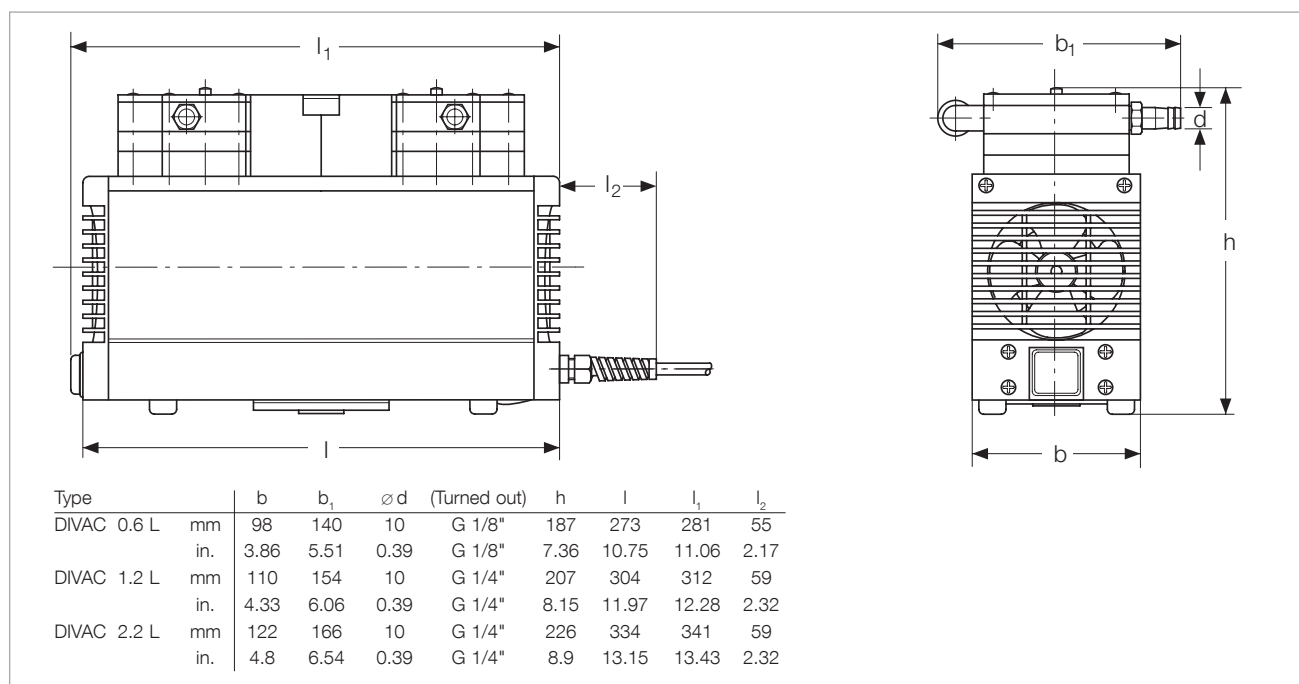

Dimensional drawing for the DIVAC 0.6 L, 1.2 L, 2.2 L

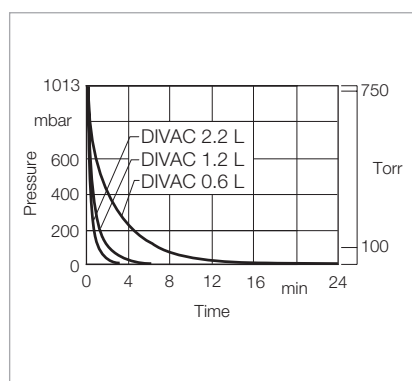

Curves of pump-down time of a 10 l vessel

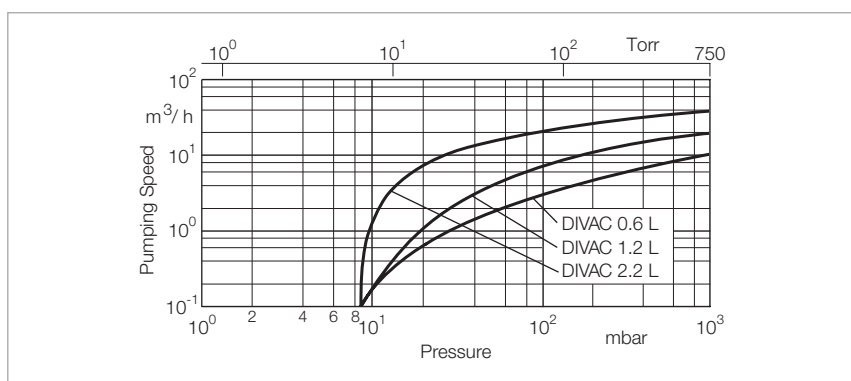

Curves of pumping capacity

## Technical Data

## DIVAC

		0.6 L	1.2 L	2.2 L
Max. pumping speed (atm.)	m <sup>3</sup> x h <sup>-1</sup> (cfm)	0.6 (0.4)	1.2 (0.7)	2.0 (1.2)
Ultimate pressure	mbar (Torr)	≤ 8 (≤ 6)	≤ 8 (≤ 6)	≤ 8 (≤ 6)
Max. exhaust back pressure (absolute)	mbar (Torr)	2000 (1500)	2000 (1500)	2000 (1500)
Pump heads		2	2	2
Connection				
Inlet (suction side)		Hose nozzle ID 10	Hose nozzle ID 10	Hose nozzle ID 10
Exhaust (delivery side)		Hose nozzle ID 10	Hose nozzle ID 10	Hose nozzle ID 10
Thread (suction and delivery side)	G	G 1/8"	G 1/4"	G 1/4"
Noise level acc. to DIN 45 635 Part 13, approx.	dB(A)	47	50	52
Permissible gas admission temperature, max.	°C (°F)	+5 to +40 (+41 to +104)	+5 to +40 (+41 to +104)	+5 to +40 (+41 to +104)
Permissible ambient temperature, max.	°C (°F)	+5 to +40 (+41 to +104)	+5 to +40 (+41 to +104)	+5 to +40 (+41 to +104)
Voltage / nominal frequency (1-ph. motor)				
Schuko plug	V / Hz	230 ± 10% / 50	230 ± 10% / 50	230 ± 10% / 50
NEMA plug	V / Hz	115 ± 10% / 60	115 ± 10% / 60	115 ± 10% / 60
NEMA plug	V / Hz	100 ± 10% / 50/60	100 ± 10% / 50/60	100 ± 10% / 50/60
Protective class	IP	44	44	44
Motor power <sup>1)</sup>	W	90	120	245
Current consumption <sup>1)</sup>	A	0.6	0.7	1.8
Motor speed				
50 Hz	min <sup>-1</sup>	1500	1500	1500
60 Hz	min <sup>-1</sup>	1800	1800	1800
Dimensions (W <sup>1)</sup> x H <sup>1)</sup> x D), approx.	mm (in.)	281 x 140 x 187 (11.06 x 5.51 x 7.36)	312 x 154 x 207 (12.28 x 6.06 x 8.15)	341 x 166 x 226 (13.43 x 6.54 x 8.9)
Weight, approx.	kg (lbs)	6.9 (15.2)	9.3 (20.5)	12.6 (27.8)
Material				
Pump head		PTFE (Teflon)	PTFE (Teflon)	PTFE (Teflon)
Structured diaphragm		PTFE coated	PTFE coated	PTFE coated
Valves		FFPM (Kalrez)	FFPM (Kalrez)	FFPM (Kalrez)
Nozzles		PVDF (Solef)	PVDF (Solef)	PVDF (Solef)

## Ordering Information

## DIVAC

	0.6 L	1.2 L	2.2 L
	Part No.	Part No.	Part No.
Diaphragm vacuum pump 230 V, 50 Hz, with 2.3 m (8 ft) power cord and Schuko plug	<b>135 00</b>	<b>135 06</b>	<b>135 12</b>
Diaphragm vacuum pump 230 V, 50/60 Hz, with 2.3 m (8 ft) power cord and Schuko plug	–	–	<b>135 11</b>
Diaphragm vacuum pump 100 V, 50/60 Hz, with 2.3 m (8 ft) power cord and NEMA plug	<b>135 02</b>	<b>135 08</b>	<b>135 14</b>
Diaphragm vacuum pump 115 V, 60 Hz, with 2.3 m (8 ft) power cord and NEMA plug	<b>135 03</b>	<b>135 09</b>	<b>135 15</b>
Spare parts kit consisting of 2 diaphragms, 4 gasket rings, 4 valve plates	<b>EK 135 23</b>	<b>EK 135 24</b>	<b>EK 135 25</b>
Hose nozzle kit consisting of 2 hose nipples, piping	–	<b>200 65 006</b>	<b>200 65 007</b>

<sup>1)</sup> For 230 V, 50 Hz version


# Three-Stage Diaphragm Vacuum Pumps

## DIVAC 1.4 HV3C




Three-stage diaphragm vacuum pump DIVAC 1.4 HV3C


The DIVAC 1.4 HV3C is a three-stage diaphragm pump capable of resisting chemicals and offering an improved pumping performance. Its speed is infinitely variable from 700 to 1600 rpm so that the pumping speed of the pump can be easily adapted to differing requirements. The built-in textured diaphragm is made of EPDM and has been coated with PTFE. The valves are made of KALREZ® thereby ensuring excellent resistance also in connection with aggressive gases. Owing to the three-stage design, pressures of 2 mbar can be attained very easily.

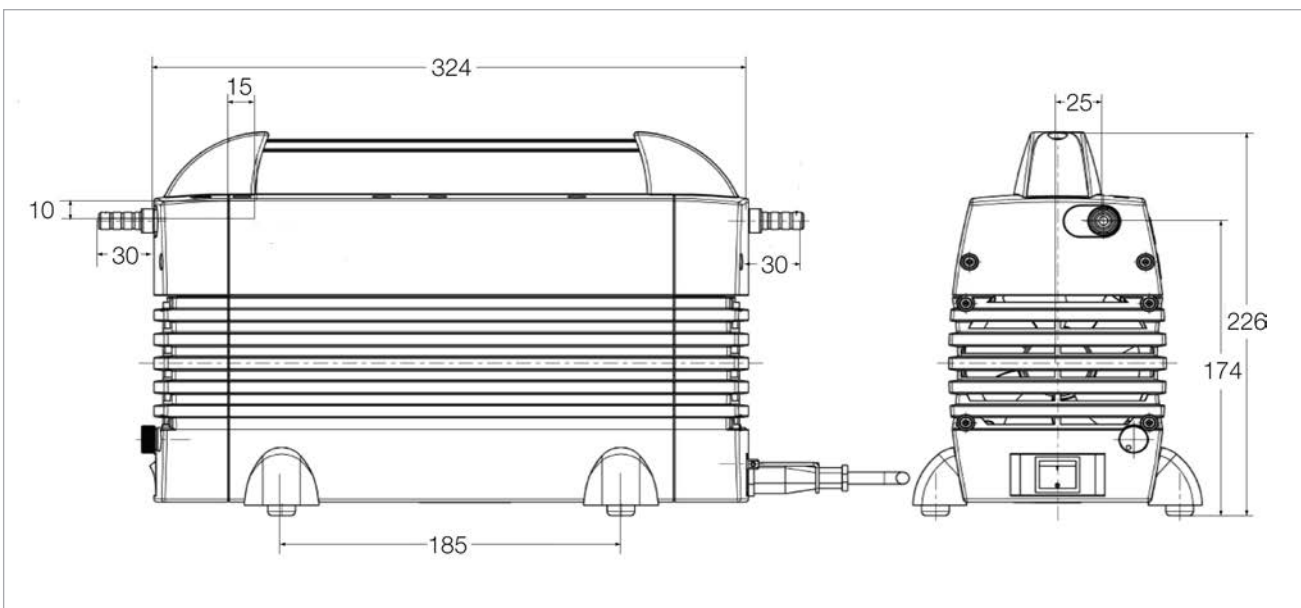

Dimensional drawing for the DIVAC 1.4 HV3C

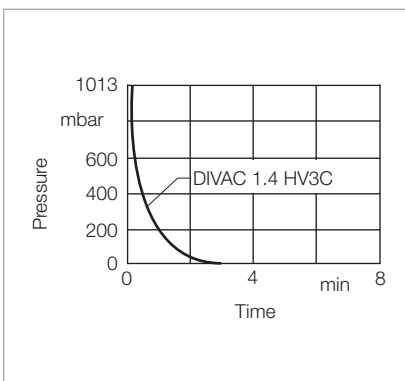

Curves of pump-down time of a 10 l vessel

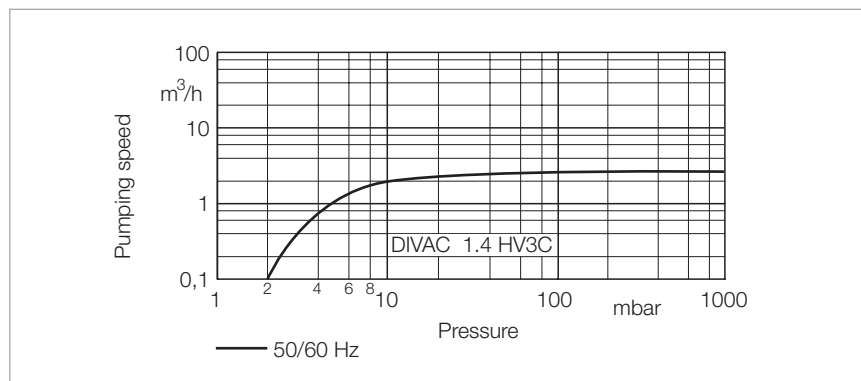

Curves of pumping capacity



## Technical Data

## DIVAC 1.4 HV3C

Max. pumping speed	m <sup>3</sup> x h <sup>-1</sup> (cfm)	1.3 (0.77)
Ultimate pressure	mbar (Torr)	≤ 2.0 (≤ 1.5)
Max. exhaust back pressure (absolute)	mbar (Torr)	1500 (1125)
Pump heads		3
Connection		
Inlet (suction side)	DN	Hose nozzle ID 10
Exhaust (delivery side)	DN	Hose nozzle ID 10
Thread (suction and delivery side)	G	G 1/8"
Noise level acc. to DIN 45 635 Part 13, approx.	dB(A)	48
Permissible gas admission temperature	°C (°F)	+5 to +40 (+41 to +104)
Permissible ambient temperature	°C (°F)	+5 to +40 (+41 to +104)
Voltage / nominal frequency	V / Hz	90-230 / 50-60
Protective class	IP	20
Motor power <sup>1)</sup>	W	135
at ultimate pressure	W	35
Current consumption <sup>1)</sup>	A	1.3
Motor speed	min <sup>-1</sup>	700 to 1600
Dimensions (W x H x D), approx.	mm (in.)	324 x 158 x 226 (12.76 x 6.22 x 8.90)
Weight, approx.	kg (lbs)	8.6 (18.99)
Material		
Pump head		Ryton
Structured diaphragm		EPDM coated with PTFE
Valves		FFPM (Kalrez)
Nozzles		PTFE

## Ordering Information


## DIVAC 1.4 HV3C

	Part No.
Diaphragm vacuum pump 90-230 V, 50-60 Hz, with 2.3 m (8 ft) power cord and Schuko plug	<b>135 20 V</b>
Accessories Exhaust silencer 1.4 with connection G 1/8"	<b>127 90 A</b>


<sup>1)</sup> For 230 V, 50 Hz version

# Dry Compressing Backing Pumps for Turbomolecular Pumps

## DIVAC 0.8 T to 4.8 VT

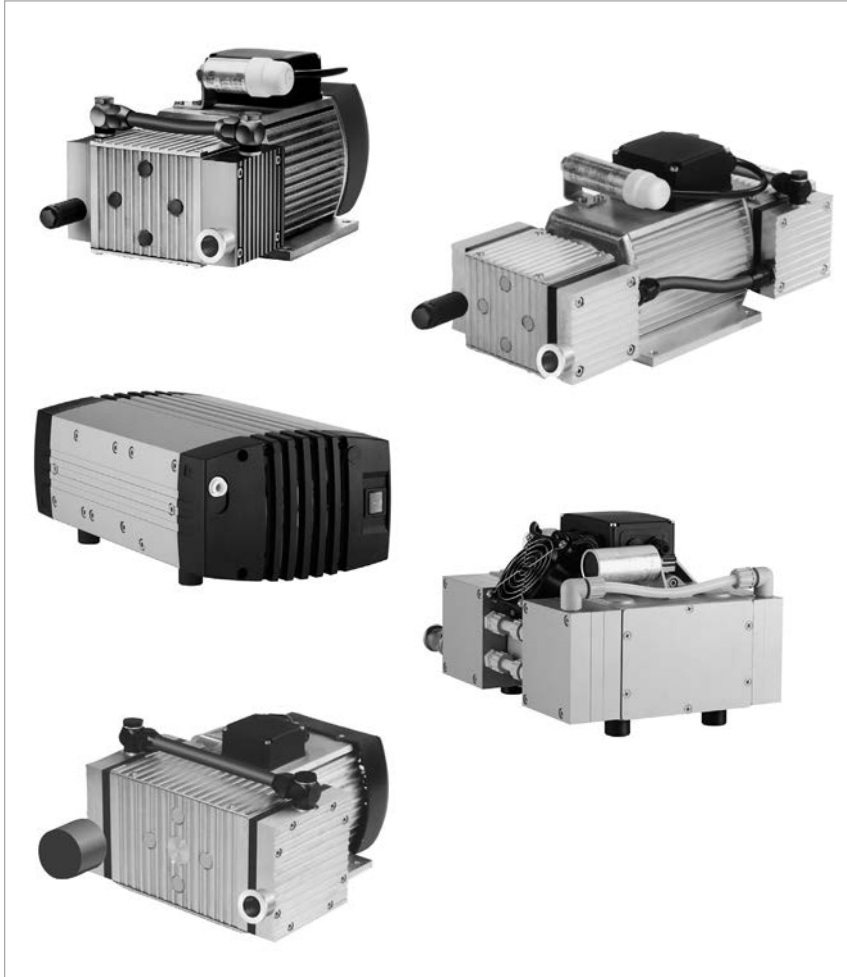

Our dry compressing backing pumps from the DIVAC T series are now supplemented by the three-stage DIVAC 1.4 HV3 and the DIVAC 3.8 HV3. Like the proven DIVAC T series, these new models also ensure a forevacuum free of hydrocarbons. Owing to their three-stage design, they provide especially within the lower pressure ranges a higher pumping speed and are therefore even better suited as backing pumps for turbomolecular pumps. But they are also used as backing pumps operating in the rough and medium vacuum range to pump clean media.

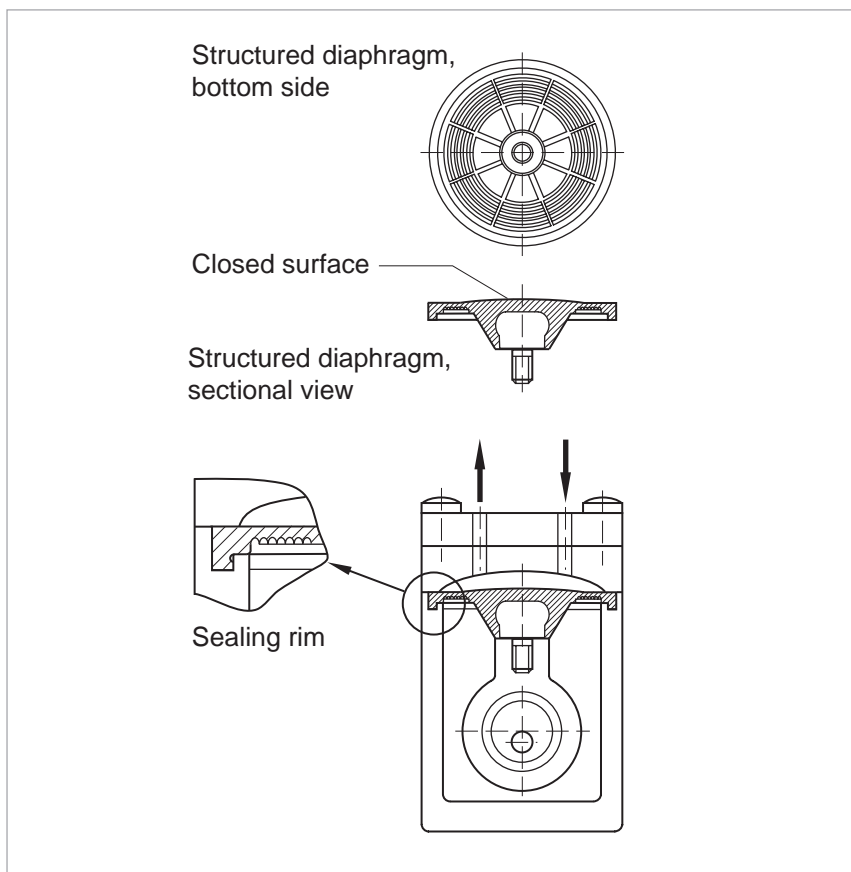

Diaphragm pump with structured diaphragm

The structured diaphragm with its sealed surface provides the basis for a long service life and a low base pressure.

### Advantages to the User

- Dry compressing, free of oil and hydro-carbons
- Matched to the turbomolecular pumps from Leybold (SL 80 to TURBOVAC 450i)
- Low ultimate pressure
- ISO-KF flange at the intake port
- Fully equipped with cable, switch (ON/OFF) and plug
- Better performance and smaller size through the use of structured diaphragms
- Low vibration levels through dynamic mass balancing (in VT pumps)
- Lower maintenance costs and long maintenance intervals through the use of high-quality and well-proven components
- Simple maintenance
- Favourable price-to-performance ratio
- Can be operated in any position

### Typical Applications

- Backing pump for wide pressure range turbomolecular pumps
- Mass spectrometers
- Medical equipment
- Analyzes
- For laboratory applications also with corrosive media
- General use for rough and fine vacuum applications


# DIVAC 0.8 T and 0.8 LT




DIVAC 0.8 T




DIVAC 0.8 LT

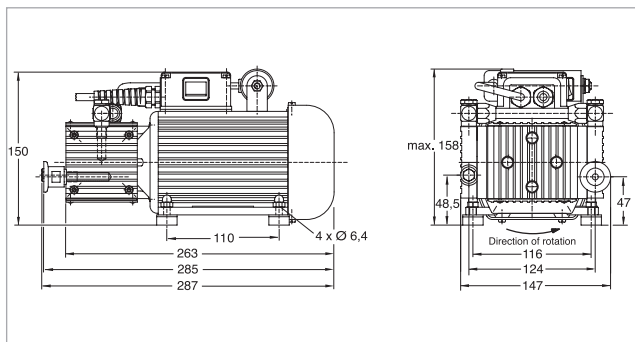


Dimensional drawing for the DIVAC 0.8 T

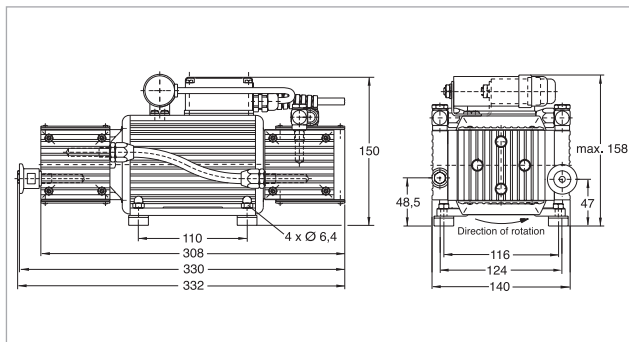

Dimensional drawing for the DIVAC 0.8 LT

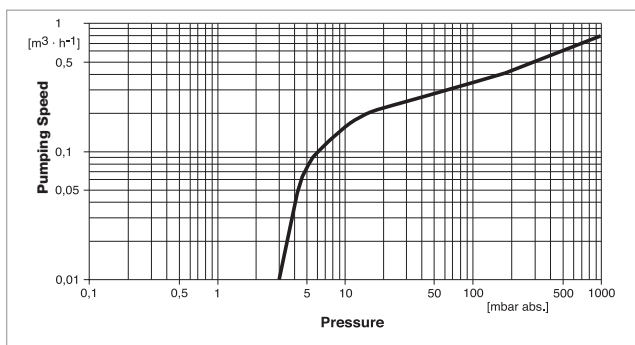

Pumping speed curve of the DIVAC 0.8 T

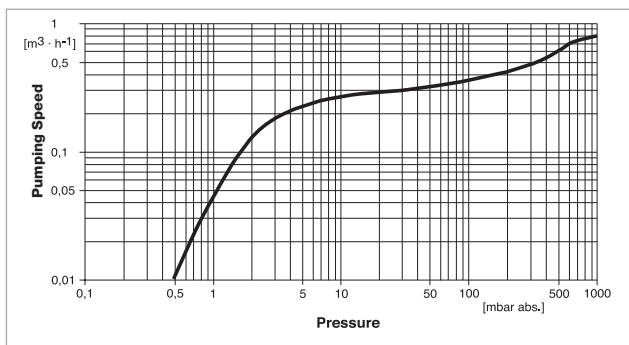

Pumping speed curve of the DIVAC 0.8 LT

## Technical Data

## DIVAC

		0.8 T	0.8 LT
Max. pumping speed (atm.)	m³/h (cfm)	0.77 (0.45)	0.77 (0.45)
Ultimate pressure (absolute)	mbar (Torr)	≤ 3.0 (≤ 2.25)	≤ 0.5 (≤ 0.38)
Max. exhaust back pressure (absolute)	mbar (Torr)	2000 (1500)	2000 (1500)
Pump heads		2	4
Connection			
Inlet (suction side)	DN	16 KF	16 KF
Exhaust (delivery side)	DN	Silencer	Silencer
Thread (suction and delivery side)		G 1/8"	G 1/8"
Noise level acc. to DIN 45 635 Part 13, approx.	dB(A)	49	53
Permissible gas admission temperature	°C (°F)	+5 to +40 (+41 to +104)	+5 to +40 (+41 to +104)
Permissible ambient temperature	°C (°F)	+5 to +40 (+41 to +104)	+5 to +40 (+41 to +104)
Voltage / nominal frequency (1-ph. motor)			
Schuko plug	V / Hz	198-264 / 50/60	230 / 50 ± 10%
NEMA plug	V / Hz	90-127 / 50/60	115 / 60 ± 10%
Protective class	IP	44	44
Motor power	W	50	80
Current consumption	A	0.4	0.5
Nominal speed, approx. (50/60 Hz)	min⁻¹	1500/1800	1500/1800
Dimensions (W x H x D), approx.	mm (in.)	285 x 150 x 150 (11.22 x 5.9 x 5.9)	332 x 150 x 150 (13.07 x 5.9 x 5.9)
Weight, approx.	kg (lbs)	5.9 (13.02)	7.5 (16.56)
Material			
Diaphragm		Neoprene	Neoprene
Valves		EPDM	EPDM
Pump head		Aluminum	Aluminum

## Ordering Information

## DIVAC

	0.8 T	0.8 LT
	Part No.	Part No.
Diaphragm vacuum backing pumps for turbomolecular pumps including 1 m (3.5 ft) long mains cord, country-specific plug, silencer, rubber feet, as well as ON/OFF switch 198-264 V / 50/60 Hz 230 V / 50 Hz ± 10%	<b>127 80</b> -	- <b>127 83</b>
Spare parts kit consisting of 2 diaphragms, 4 valves, 4 valve gaskets, 4 piping gaskets	<b>EK 127 95</b>	<b>EK 127 95 (2x)</b>
Exhaust silencer	<b>127 98</b>	<b>127 98</b>

T = For use in connection with Turbomolecular pumps

L = Very low ultimate pressure (Low pressure)

V = Low vibration levels (Low Vibration)

## DIVAC 1.4 HV3 and 3.8 HV3




DIVAC 1.4 HV3




DIVAC 3.8 HV3


The three-stage DIVAC 1.4 HV3 and the DIVAC 3.8 HV3 provide especially in the lower pressure range a higher pumping speed compared to conventional diaphragm pumps. At the same time they are capable of attaining ultimate pressures below 2 mbar (1.5 Torr) and are thus very well suited as backing pumps for turbomolecular pumps. Owing to their compact design they are also suited for installation within pump systems.

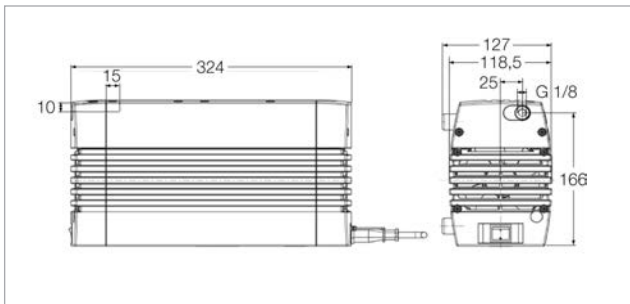


Dimensional drawing for the DIVAC 1.4 HV3

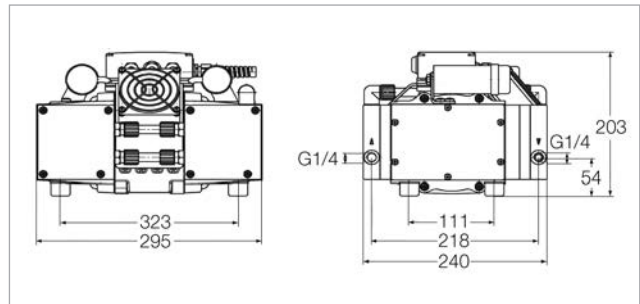

Dimensional drawing for the DIVAC 3.8 HV3

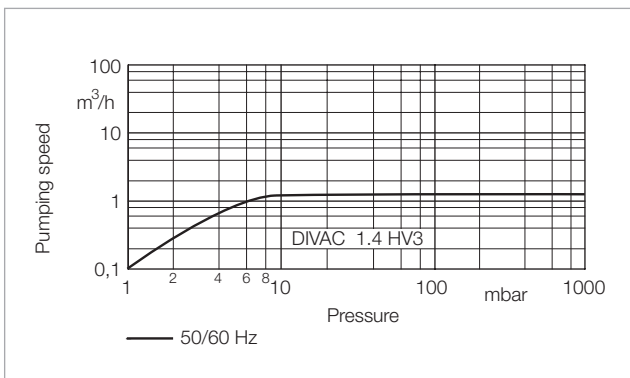

Pumping speed curve of the DIVAC 1.4 HV3

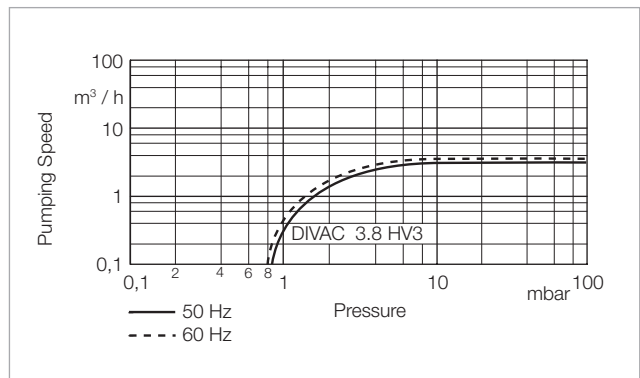

Pumping speed curve of the DIVAC 3.8 HV3

## Technical Data

## DIVAC


		1.4 HV3	3.8 HV3
Max. pumping speed			
50 Hz	m³/h (cfm)	1.3 (0.77)	3.4 (2.00)
60 Hz	m³/h (cfm)	–	3.8 (2.24)
Ultimate pressure	mbar (Torr)	≤ 1.5 (≤ 1.13)	≤ 1.0 (≤ 0.75)
Max. exhaust back pressure (absolute)			
	mbar (Torr)	1500 (1125)	1500 (1125)
Pump heads		3	3
Connection			
Inlet (suction side)		Hose nozzle ID 9	Hose nozzle ID 10
Exhaust (delivery side)		Hose nozzle ID 9	Hose nozzle ID 10
Thread (suction and delivery side)		G 1/8"	G 1/4"
Noise level acc. to DIN 45 635 Part 13, approx.	dB(A)	48	54
Permissible gas admission temperature, max.	°C (°F)	+5 to +40 (+41 to +104)	+5 to +40 (+41 to +104)
Permissible ambient temperature, max.	°C (°F)	+5 to +40 (+41 to +104)	+5 to +40 (+41 to +104)
Voltage / nominal frequency (1-ph. motor)			
Schuko plug	V / Hz	90-230 / 50-60	90-230 / 50-60
NEMA plug	V / Hz	–	115 / 50-60
Protective class	IP	20	20
Motor power	W	120	250
at ultimate pressure	W	35	190
Current consumption	A	1.3	1.7
Nominal speed, approx. (50/60 Hz)	min⁻¹	1500	1500/1800
Dimensions (W x H x D), approx.	mm (in.)	324 x 158 x 226 (12.76 x 6.22 x 8.90)	295 x 240 x 203 (11.61 x 9.45 x 7.99)
Weight, approx.	kg (lbs)	10.5 (23.18)	18.9 (41.72)
Material			
Pump head		Aluminum	Aluminum
Structured diaphragm		EPDM	EPDM
Valves		EPDM	EPDM
Nozzles		PA	PA

## Ordering Information


## DIVAC

	1.4 HV3	3.8 HV3
	Part No.	Part No.
Diaphragm vacuum backing pumps for turbomolecular pumps including 1 m (3.5 ft) long mains cord, country-specific plug, silencer, rubber feet, as well as ON/OFF switch		
90-230 V / 50-60 Hz	<b>127 90 V</b>	–
230 V / 50-60 Hz	–	<b>127 95 V</b>
115 V / 50-60 Hz	–	<b>127 96 V</b>
Exhaust silencer		
1.4 with connection G 1/8"	<b>127 90 A</b>	–
3.8 with connection G 1/4"	–	<b>127 95 A</b>
Spare parts kit	<b>EK057456</b>	<b>EK12768</b>


# DIVAC 4.8 VT

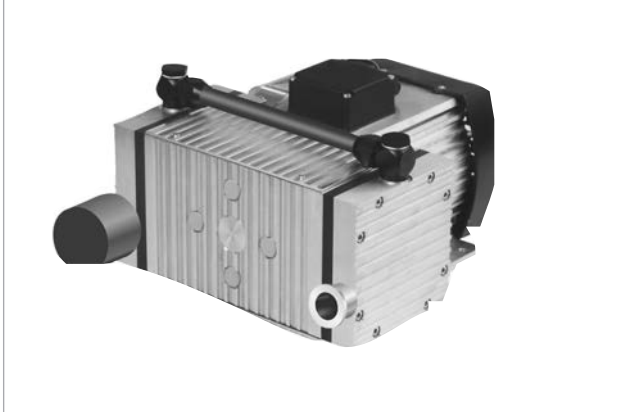

DIVAC 4.8 VT

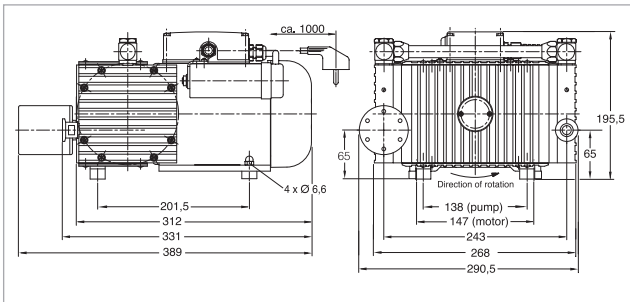

Dimensional drawing for the DIVAC 4.8 VT

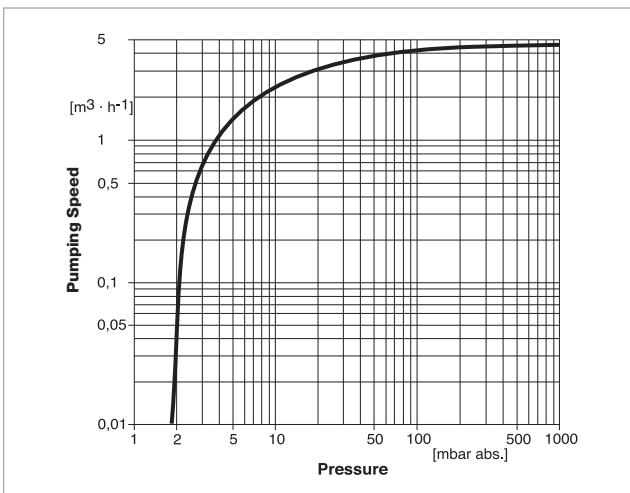

Pumping speed curve of the DIVAC 4.8 VT



## Technical Data

### DIVAC 4.8 VT

Max. pumping speed (atm.)	m³/h (cfm)	4.8 (2.83)
Ultimate pressure (absolute)	mbar (Torr)	≤ 2 (≤ 1.5)
Max. exhaust back pressure (absolute)	mbar (Torr)	2000 (1500)
Pump heads		2
Connection		
Inlet (suction side)	DN	16 KF
Exhaust (delivery side)	DN	Silencer
Thread (suction and delivery side)	G	G 3/8"
Noise level acc. to DIN 45 635 Part 13, approx.	dB(A)	55
Permissible gas admission temperature, max.	°C (°F)	+5 to +40 (+41 to +104)
Permissible ambient temperature, max.	°C (°F)	+5 to +40 (+41 to +104)
Voltage / nominal frequency (1-ph. motor)		
Schuko plug	V / Hz	230 / 50 ± 10%
NEMA plug	V / Hz	115 / 60 ± 10%
Protective class	IP	54
Motor power	W	350
Current consumption	A	2.6
Nominal speed, approx. (50 Hz)	min⁻¹	1500
Dimensions (W x H x D), approx.	mm (in.)	324 x 273 x 220 (12.76 x 10.75 x 8.66)
Weight, approx.	kg (lbs)	18.0 (39.74)
Material		
Diaphragm		EPDM
Valves		Viton
Pump head		Aluminum

## Ordering Information

### DIVAC 4.8 VT

	Part No.
Diaphragm vacuum backing pumps for turbomolecular pumps including 1 m (3.5 ft) long mains cord, country-specific plug, silencer, rubber feet, as well as ON/OFF switch 230 V / 50 Hz ± 10%	<b>127 92</b>
Spare parts kit consisting of 2 diaphragms, 4 valves, 4 valve gaskets, 4 piping gaskets	<b>EK 127 97</b>
Exhaust silencer	<b>127 94</b>

T = For use in connection with Turbomolecular pumps

L = Very low ultimate pressure (Low pressure)

V = Low vibration levels (Low Vibration)

# General

## Applications and Accessories for SCROLLVAC Pumps

Pumps	SC 5 D	SC 15 D	SC 30 D	SC 60 D
<b>Applications</b>				
Electron beam melting	■	■	■	■
Lasers	■	■	■	■
Leak detection systems	■		■	
Accelerators / Synchrotrons	■	■	■	■
Surface analysis instruments	■			
Scanning electron microscopy	■	■	■	■
Loadlock		■	■	■
Spectroscopy	■			
Lamps manufacture	■	■	■	■
As backing pump for turbomolecular pump systems	■	■	■	■

# Products

## Oil-free Scroll Vacuum Pumps SCROLLVAC SC 5 to SC 60 D




Scroll vacuum pump SCROLLVAC, from left to right: SC 60 D, SC 30 D, SC 15 D, SC 5 D

### Advantage for the User

- Absolutely oil-free
- High effective pumping speed
- Low ultimate pressure
- Low noise level
- Low vibration operation
- Atmospheric inlet pressure allowable
- Low weight
- Air cooling
- Low power consumption
- Integrated operating hours counter

### Typical Applications

- Electron beam welding
- Lasers
- Leak detection systems
- Accelerators / synchrotrons
- Surface analysis instruments
- Scanning electron microscopes
- Load lock
- Spectroscopy
- Lamp manufacturing
- As a backing pump for turbomolecular pump systems

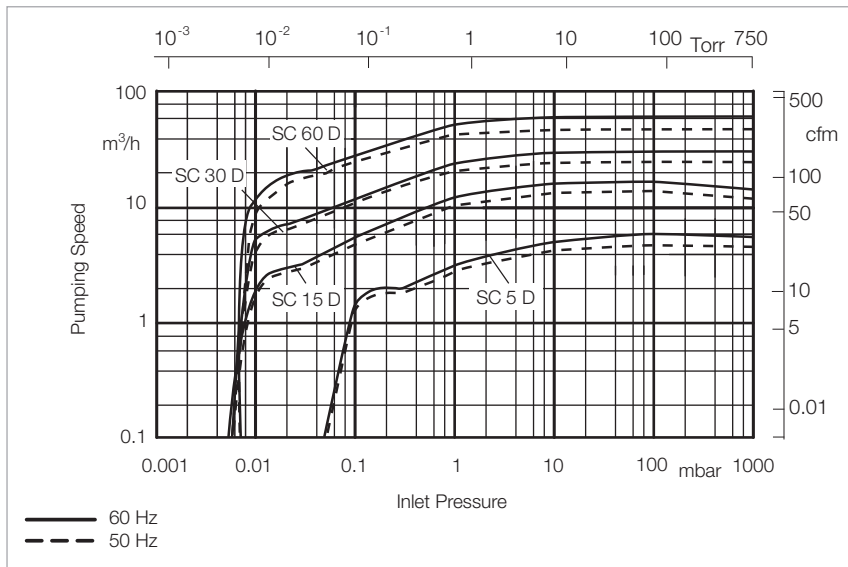

Pumping speed curves for the scroll vacuum pumps SCROLLVAC SC - D

In 1905 the principle of the scroll compressor was developed by the Frenchman Leon Creux. The scroll pump is now being used as an oil-free vacuum pump. Every scroll pump consists of two Archimedes spirals engaging each other with an offset of 180°. Thus several crescent-shaped pockets of differing sizes are created. By means of an eccentric drive, a second spiral is made to orbit about a fixed spiral, thus reducing the volume of the pockets and compressing gases from the outside towards the inside thereby pumping the gases. Important to the quality of a scroll pump is that precise manufacturing tolerances are maintained and that suitable materials are selected.

### Maintenance Intervals

In order to maintain the performance of the pump, a standard maintenance is required after a certain number of operating hours.


For this we are offering complete maintenance kits

- Small maintenance kit (Minor Kit) after 8,000 h or at latest after an operating time of 12 months
- Large maintenance kit (Major Kit) after 16,000 hours or at latest after an operating time of 24 months

### Warranty

Upon signing a warranty contract, we will grant a two-year warranty for faulty material when complying with the required maintenance intervals.

Excluded are wearing parts as well as well wear due to the process.

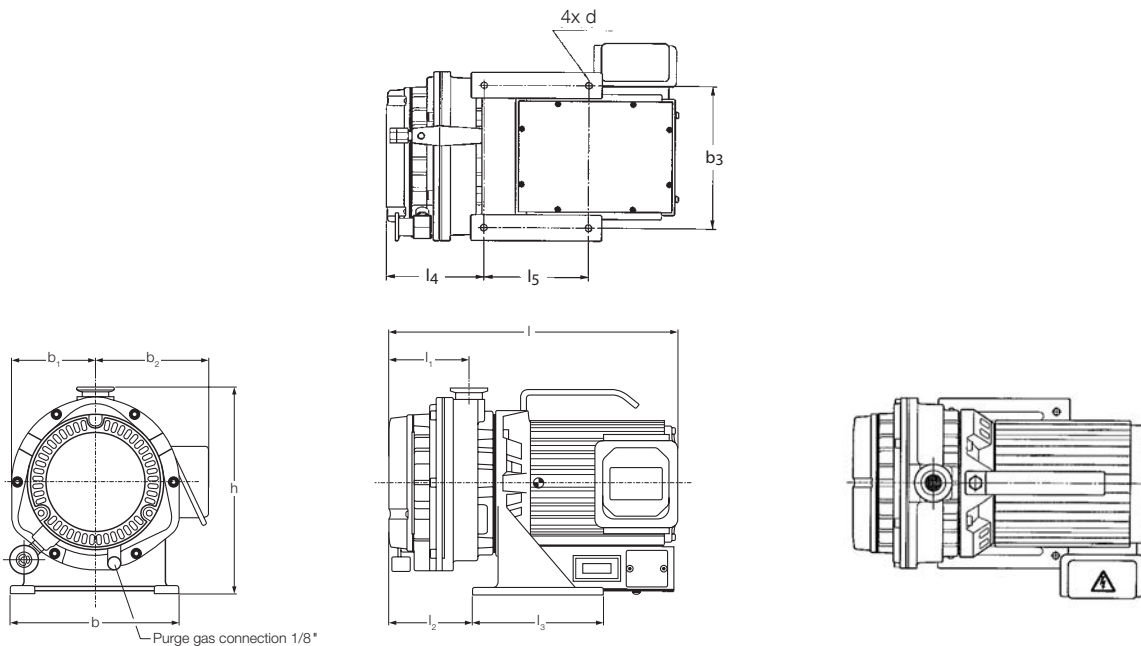


Type		b	b <sub>1</sub>	b <sub>2</sub>	b <sub>3</sub>	∅ d	h	h <sub>1</sub>	h <sub>2</sub>	l	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>	l <sub>6</sub>	l <sub>7</sub>
SC 5 D	mm	180	91	123	154	7	225	—	—	308	85	90	140	104	112	—	—
	in.	7.09	3.58	4.84	6.06	0.28	8.86	—	—	12.13	3.35	3.54	5.51	40.95	4.41	—	—
SC 15 D	mm	180	222	—	136	11	336	38	73.5	400 <sup>1)</sup>	96	101	170	121	130	52	40
	in.	7.09	8.74	—	5.35	0.43	13.23	1.50	2.89	15.75 <sup>1)</sup>	3.78	3.98	6.69	4.76	5.12	2.05	1.58

<sup>1)</sup> 370 (14.57 in.) for 3~ version

3 phase


1 phase

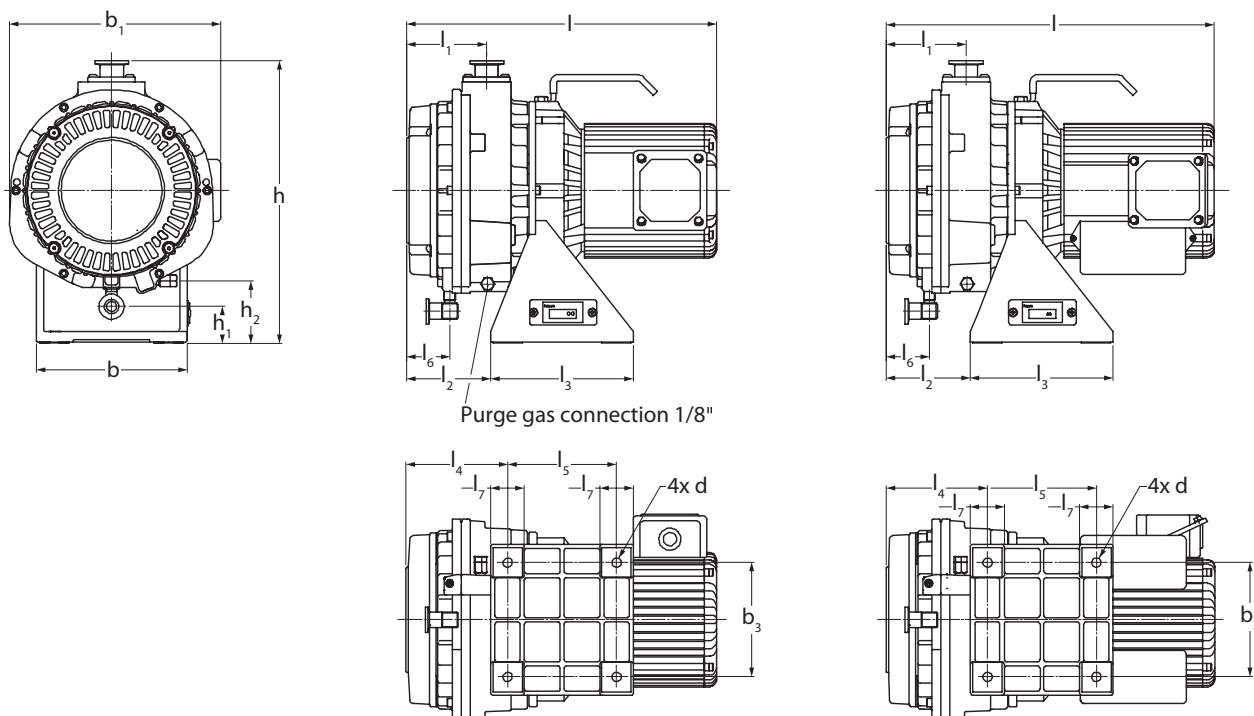

Dimensional drawing for the scroll vacuum pump SCROLLVAC SC 5 D (above) and SC 15 D (below)

### 3 phase


### 1 phase

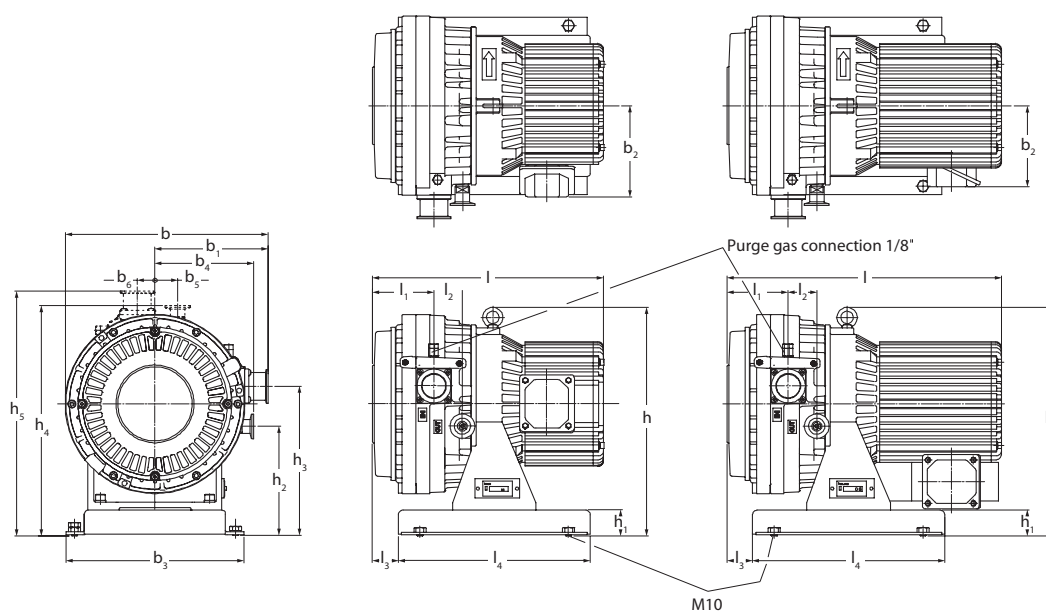

Type		b	b <sub>1</sub>	b <sub>2</sub>	b <sub>3</sub>	b <sub>4</sub>	b <sub>5</sub>	b <sub>6</sub>	h	h <sub>1</sub>	h <sub>2</sub>	h <sub>3</sub>	h <sub>4</sub>	h <sub>5</sub>	l	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>
SC 30 D	mm	328	183	131 <sup>1)</sup>	288	159	36	29	372	42	178	243	373	397	443 <sup>2)</sup>	99	46	42	310
	in.	12.91	7.20	5.16 <sup>1)</sup>	11.34	6.26	1.42	1.14	4.65	1.65	7.01	9.57	14.69	15.63	17.44 <sup>2)</sup>	3.90	1.81	1.65	12.20
SC 60 D	mm	390	218	168	320	—	—	—	421	42	163	285	—	—	467	133	—	55	350
	in.	13.35	8.58	6.61	12.60	—	—	—	16.58	1.65	6.42	11.22	—	—	18.39	5.24	—	2.17	13.78

<sup>1)</sup> 147 (5.79 in.) for 3~ version

<sup>2)</sup> 372 (14.65 in.) for 3~ version

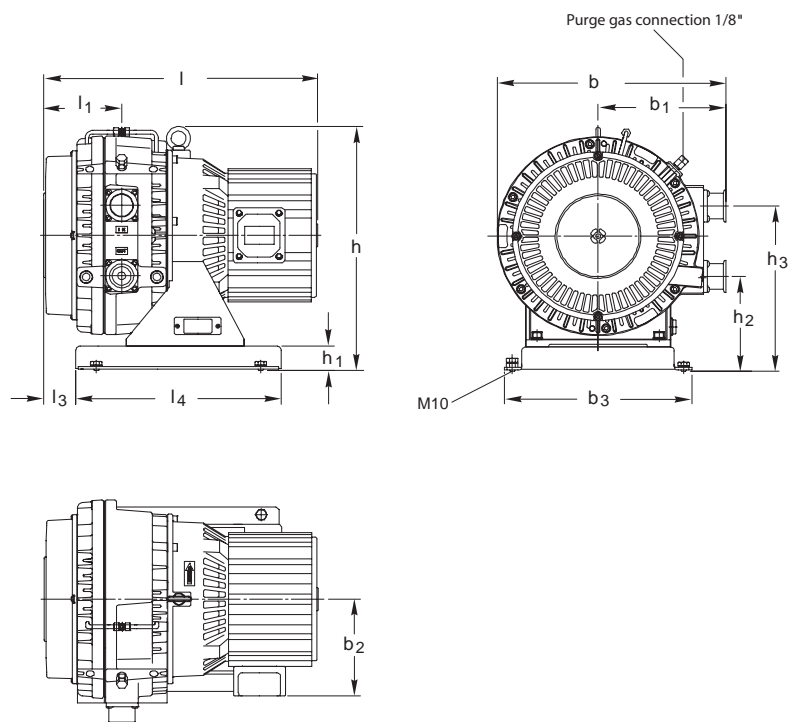

Dimensional drawing for the scroll vacuum pump SCROLLVAC SC 30 D (above) and SC 60 D (below)

## Technical Data

## SCROLLVAC

		SC 5 D	SC 15 D	SC 30 D	SC 60 D
Nominal pumping speed <sup>1)</sup>					
50 Hz	m <sup>3</sup> /h (cfm)	5.4 (3.2)	15.0 (8.8)	30.0 (17.7)	60.0 (35.4)
60 Hz	m <sup>3</sup> /h (cfm)	6.4 (3.8)	18.0 (10.6)	36.0 (21.2)	72.0 (42.4)
Pumping speed <sup>1)</sup>					
50 Hz	m <sup>3</sup> /h (cfm)	4.8 (2.8)	13.0 (7.7)	26.0 (13.3)	52.0 (30.6)
60 Hz	m <sup>3</sup> /h (cfm)	6.0 (3.5)	15.5 (9.1)	31.0 (18.3)	62.0 (36.5)
Attainable ultimate pressure	mbar (Torr)	≤ 0.05 (≤ 0.038)	≤ 0.016 (≤ 0.012)	≤ 0.01 (≤ 0.008)	≤ 0.01 (≤ 0.008)
Leak rate	mbar l/s	1 x 10 <sup>-6</sup>	1 x 10 <sup>-6</sup>	1 x 10 <sup>-6</sup>	1 x 10 <sup>-4</sup>
Maximum inlet pressure		Atmosphere	Atmosphere	Atmosphere	Atmosphere
Permissible ambient temperature	°C (°F)	+5 to +40 (+41 to +104)	+5 to +40 (+41 to +104)	+5 to +40 (+41 to +104)	+5 to +40 (+41 to +104)
Connections					
Inlet	DN	25	25	40	40
Exhaust	DN	16	16	25	40
Cooling		Air	Air	Air	Air
Water vapor capacity with purge, max.	g/h	0.2	1.04	1.04	1.04
	l/min	9	10	10	10
Protection class	IP	20	20	20	20
Motor power	W (hp)	150 (0.20)	400 (0.54)	600 (0.82)	1400 (1.90)
Motor speed					
50 Hz	min <sup>-1</sup> (rpm)	1440 (1440)	1450 (1450)	1450 (1450)	1460 (1460)
60 Hz	min <sup>-1</sup> (rpm)	1740 (1740)	1730 (1730)	1730 (1730)	1760 (1760)
Motor voltage	1-ph. <sup>2)</sup>	100 V / 50 Hz 100 - 115 V / 60 Hz 200 - 230 V / 50/60 Hz	100 V / 50 Hz 100 - 115 V / 60 Hz 200 - 230 V / 50/60 Hz	100 V / 50 Hz 100 - 115 V / 60 Hz 200 - 230 V / 50/60 Hz	
	3-ph.		200 V, 380 - 415 V / 50 Hz  200 - 380 V, 460 V / 60 Hz	200 V, 380 - 415 V / 50 Hz  200 - 380 V, 460 V / 60 Hz	200 V, 380 - 400 - 415 V / 50 Hz  200 - 220 - 230 V, 460 V, 60 Hz
Noise level at 1 m (3.5 ft), free field measurement	dB(A)	≤ 52	≤ 58	≤ 62	≤ 67
Dimensions (W x H x D)	mm (in.)	308 x 214 x 225 (12.13 x 8.43 x 8.86)	400 x 252 x 336 (15.75 x 9.92 x 13.23)	443 x 328 x 372 (17.44 x 12.91 x 14.65)	467 x 390 x 421 (18.39 x 15.35 x 16.57)
Weight					
Single-phase motor	kg (lbs)	14 (30.9)	25 (55.2)	44 (97.1)	—
Three-phase motor	kg (lbs)	—	23 (50.8)	38 (83.9)	60 (132.5)

<sup>1)</sup> In accordance with DIN 28 400

<sup>2)</sup> The Part No. for single-phase pumps will determine the voltage range at delivery

## Ordering Information

## SCROLLVAC

	SC 5 D	SC 15 D	SC 30 D	SC 60 D
	Part No.	Part No.	Part No.	Part No.
Oil-free scroll vacuum pump				
Single-phase motor, with cable and plug				
Europe (Schuko plug, 230 V)	<b>133 000</b>	<b>133 001</b>	<b>133 002</b>	-
US / Japan (NEMA plug, 115 V)	<b>133 100</b>	<b>133 101</b>	<b>133 102</b>	-
Three-phase motor, without cable	-	<b>133 003</b>	<b>133 004</b>	<b>133 008</b>
Maintenance kits				
Small maintenance kit (after 8,000 h) Minor Kit	<b>EK 870000496</b>	<b>EK 870000497</b>	<b>EK 870000498</b>	<b>EK 870000519</b>
Large maintenance kit (after 16,000 h) Major Kit	<b>EK 870000499</b>	<b>EK 870000500</b>	<b>EK 870000501</b>	<b>EK 870000520</b>
Tool kit SC 5/15/30/60 D	<b>EK 870000502</b>	<b>EK 870000503</b>	<b>EK 870000503</b>	<b>EK 870000521</b>
Scroll profile gasket (Tip Seal)	<b>E 870000510</b>	<b>E 870000511</b>	<b>E 870000512</b>	<b>E 870000522</b>
Shaft installation kit (Pin Crank Kit)	<b>EK 870000507</b>	<b>EK 870000508</b>	<b>EK 870000509</b>	<b>EK 870000523</b>

## Applications for ECODRY plus Pumps

Pumps	ECODRY 40 plus	ECODRY 65 plus
<b>Application</b>		
Mass spectrometry	■	■
Electron microscopy	■	■
Vacuum drying	■	■
Particle accelerators / Synchrotron	■	■
Spectroscopy	■	■
Regeneration of cryo pumps	■	■
Backing pumps for turbomolecular pumps	■	■
Surface analysis	■	■



# Products

## ECODRY plus multi-stage Roots vacuum pumps

### ECODRY 40 plus, ECODRY 65 plus



The ECODRY plus is a newly developed family of dry-compression multi-stage Roots vacuum pumps, which sets new standards in noise reduction. The pumps have been specially designed for use in quiet and clean environments, such as analysis and research laboratories.

Dry Compressing  
Vacuum Pumps

#### Operating principle

The multi-stage Roots pump is a further development of the tried-and-tested Roots pump principle. Two contactless rotating rotors turn in contrary motion within a single pump housing. The rotors do not come into contact with one another, or with the pump housing. Through their rotation, they convey the gas from the intake flange on the upper side to the outlet aperture on the bottom of the suction chamber. In ECODRY plus, there are eight pump chambers in succession along the same axis. The outlet apertures are connected to the respective intake aperture of the ensuing chamber via channels in the pump housing. The pump's operating range extends from the medium vacuum range to ambient pressure.

Short channels between the compression stages, combined with a high rotational speed of 12,600 rpm, make a compact construction with simultaneously high suction capacity possible. Lubrication takes place only in the shaft bearing regions. These are separated from the suction chamber by means of a wear-free sealing system, so that no lubricant can find its way into the suction chamber or into the vacuum chamber.

#### Low-noise operation

During the design phase, particular emphasis was placed on reducing the pumps' noise levels. The rotors' high manufacturing quality guarantees that the pumps will run with a low level of vibration, and consequently with a low level of noise, even at high inlet pressures. Efficient noise insulation is integrated within the pump housing, to shield the user from residual noise. The silencer integrated within the exhaust region further serves to minimize noise, even at high gas flow rates. These combined measures achieve a noise level of less than 52 dB(A) – quieter than a normal conversation

#### Clean environment

Thanks to the oil-free suction chamber, no lubricant can enter the vacuum chamber or the area surrounding the pump. Furthermore, because the rotors operate contact-free, no abrasive debris is created in the form of particles, which could contaminate the vacuum chamber. This guarantees long-term stable operation with no deterioration in final pressure or suction capacity.

#### Ease of commissioning

The ECODRY plus models have a compact housing and are simple to operate. With integrated castors and their low weight, they can be easily rolled out of their packaging and on to their installation location. There is no need for elaborate power cabling, as the pumps can be connected directly to a single-phase electricity supply. The pumps are air-cooled, and therefore require no connection to a water supply for the purposes of cooling.

#### Maintenance-free operation

ECODRY plus features a friction-free operating principle, so their components are not exposed to wear in any way. The ECODRY plus's shaft bearings are designed for up to five years' operation. Maintenance measures such as replacing seals or changing the oil are not required during that time.

### High water vapour tolerance


In drying applications, such as cryo-pump regeneration, or when pumping out vacuum chambers with large surface areas, high quantities of water vapour may accrue. Not every pump can handle this without difficulty, as condensation in the pump can lead to corrosion and pump failure. However, with its gas ballast valve open, the ECODRY plus can pump water vapour at rates of up to 500 g/h without internal condensation. Because the manually operated gas ballast inlet has an integrated silencer, the pump is quieter than any of its competitors in these applications.

### Benefits at a glance

- Quietest pump in its class: it will not disturb your work
- Clean vacuum generation with no contamination of workstation or vacuum chamber
- Many years of maintenance-free operation without deterioration of vacuum parameters

### Typical applications

- Mass spectrometry
- Electron microscopy
- Backing pump for turbomolecular pumps
- Drying
- Accelerator/synchrotron
- Spectroscopy
- Regeneration of cryopumps
- Surface analysis

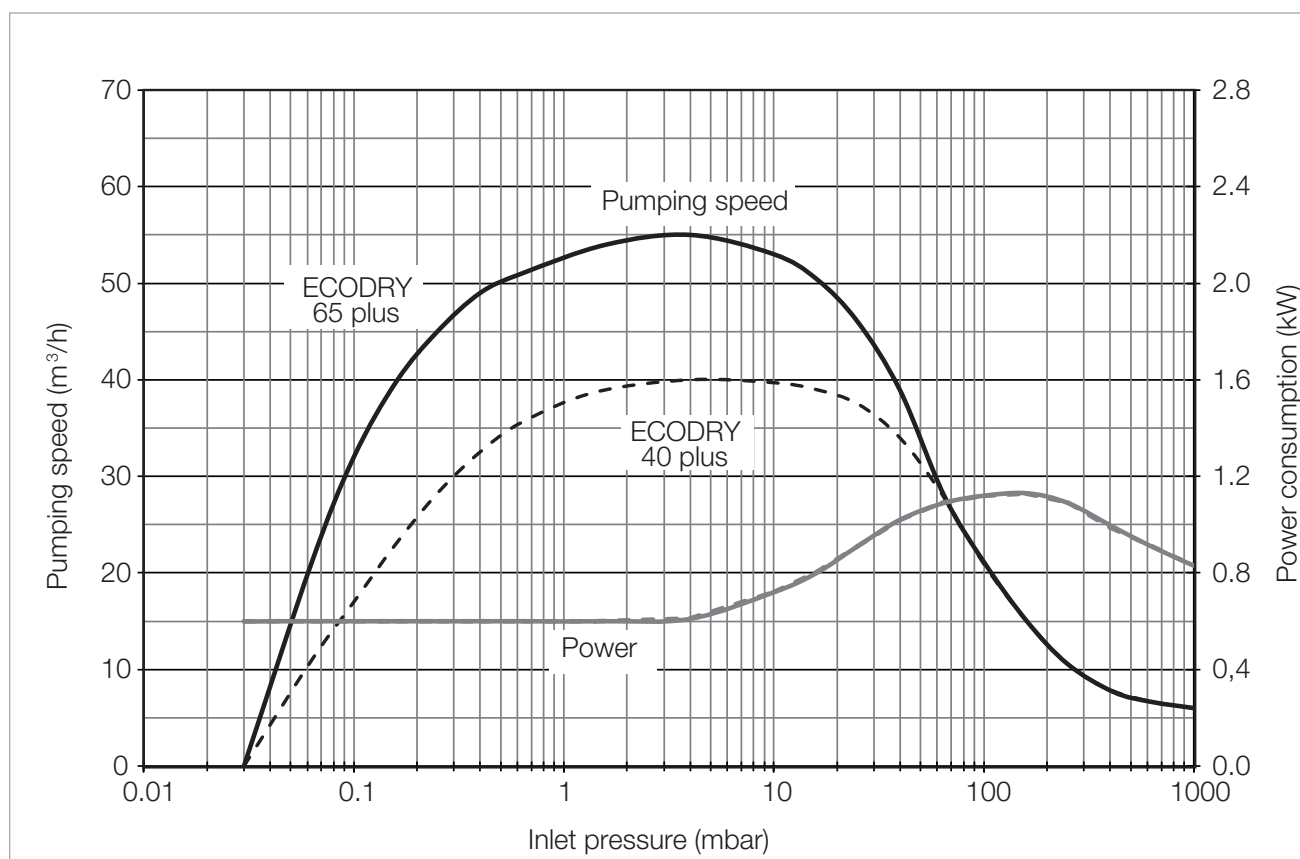


Pumping speed curves for the ECODRY plus - pumps

## Technical Data

### ECODRY 40 plus

### ECODRY 65 plus

Maximum pumping speed without gas ballast	m <sup>3</sup> /h	40	55
Ultimate pressure without gas ballast	mbar	< 0.03	< 0.03
Ultimate pressure with gas ballast	mbar	< 0.1	< 0.1
Leak rate	mbar l/s	< 10 <sup>-5</sup>	< 10 <sup>-5</sup>
Water vapour tolerance with gas ballast	mbar	20	20
Water vapour capacity with gas ballast	g/h	300	500
Maximum permissible inlet pressure	mbar	1050	1050
Permissible ambient temperature	°C	+5 to +40	+5 to +40
Max. installation height (up to NHN)	m	2000	2000
Cooling		Air	Air
Mains voltage	V	200-240 +/- 10%	200-240 +/- 10%
Frequency	Hz	50/60	50/60
Phases		1-ph	1-ph
Max. power consumption	W	1200	1200
Power consumption at ultimate pressure	W	600	600
Plug connector for power supply		C 20 acc. to IEC 60320	C 20 acc. to IEC 60320
Rotational speed	rpm	12600	12600
Protection class	IP	42	42
Intake flange		DN 25 ISO-KF	DN 40 ISO-KF
Outlet flange		DN 16 ISO-KF	DN 16 ISO-KF
Weight, approx.	kg	43	43
Dimensions (L x W x H)	mm	623 x 320 x 298	623 x 320 x 298

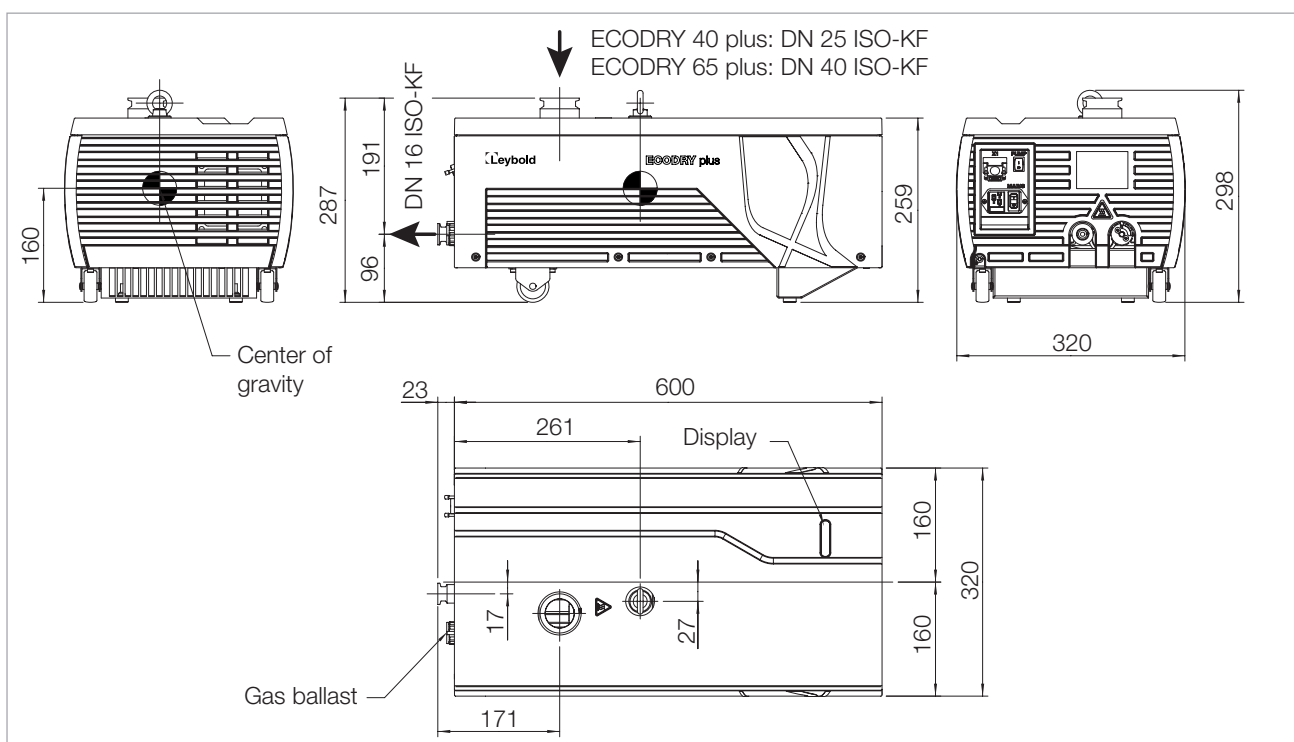

Dimensional drawing for the ECODRY plus - pumps, all dimensions in mm

## Ordering Information

### ECODRY 40 plus

### ECODRY 65 plus

	Part No.	Part No.
Dry Compressing Vacuum Pump ECODRY plus	<b>161 040 V01</b>	<b>161 065 V01</b>
<b>Accessories</b>		
<b>Mains cable (required for pump operation)</b>		
Mains cable Europe CEE 7/7 (Schuko) – IEC-60320 C19 Length 2.0 m	<b>161 810 EU</b>	
Mains cable Great Britain BS 1363 – IEC-60320 C19 Length 2.0 m	<b>161 810 UK</b>	
Mains cable US NEMA 6-15P – IEC-60320 C19 Length 2.5 m	<b>161 810 US</b>	
<b>Optional accessories</b>		
Inlet screen DN 25 ISO-KF	<b>E41170206</b>	-
Inlet screen DN 40 ISO-KF	-	<b>E41170121</b>
Casing assembly mounting kit and earthquake protection	<b>161 831 A</b>	
RS485/USB connecting cable for X104 interface, 1.8 m	<b>161 820 USB</b>	
LEYASSIST software	<b>230 439 V01</b>	
Replacement control interface jumper	<b>161 823 A</b>	


## Applications for LEYVAC Pumps

Dry compressing vacuum pumps										
	LEYVAC LV 80	LEYVAC LV 80 C	LEYVAC LV 80 CC	LEYVAC LV 140	LEYVAC LV 140 C	LEYVAC LV 140 CC	LEYVAC LV 250	LEYVAC LV 250 C	LEYVAC LV 250 CC	
<b>Applications</b>										
<b>Process industry</b>										
Industrial furnaces	■	■	■	■	■	■	■	■	■	■
Degassing	■	■	■	■	■	■	■	■	■	■
Charging	■	■	■	■	■	■	■	■	■	■
Casting	■	■	■	■	■	■	■	■	■	■
Drying processes in general				■	■	■	■	■	■	■
Freeze drying	■	■	■	■	■	■	■	■	■	■
Packaging	■	■	■	■	■	■	■	■	■	■
<b>Coating</b>										
CVD coating	■	■	■	■	■	■	■	■	■	■
Plasma coating	■	■	■	■	■	■	■	■	■	■
Glass coating	■	■	■	■	■	■	■	■	■	■
Web coating	■	■	■	■	■	■	■	■	■	■
<b>Solar</b>										
CVD/PECVD	■	■	■	■	■	■	■	■	■	■
Crystal pulling and casting	■	■	■	■	■	■	■	■	■	■
<b>Support functions</b>										
Regeneration of cryo pumps	■	■	■	■	■	■	■	■	■	■
Forevacuum pumps for Turbomolecular pumps	■	■	■	■	■	■	■	■	■	■

# Products

## LEYVAC

### Excellent efficiency in every respect

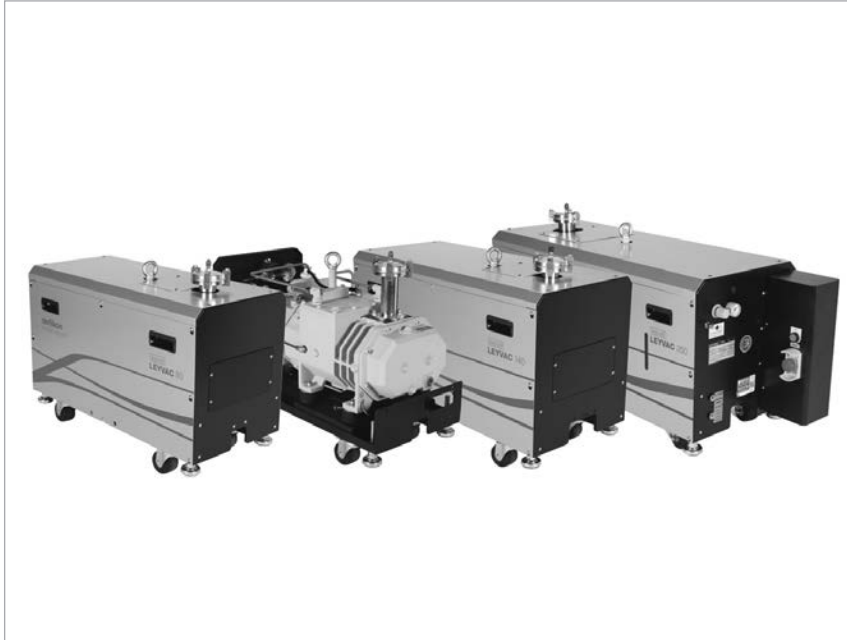

LEYVAC LV 80, 140 and 250

**Our LEYVAC dry vacuum pumps provide power combined with high performance.**

This product line covers the pumping speed ranges from 80 to 300 m<sup>3</sup>/h and is especially suited to meet the special requirements of industrial processes and coating applications.

LEYVAC pumps and system combinations are rugged, reliable and durable, ready to cope with harsh process requirements.

The LEYVAC product line comprises the models LEYVAC LV 80, LV 140, LV 250 and their C or CC versions.

The new LEYVAC 250 significantly expands the performance spectrum of this product range with excellent energy efficiency characteristics.

The CC versions include an overtemperature safety shutdown facility.

#### Advantages to the User

- Dry pump technology
- No contact of the process gases with oil
- Shortest pumpdown times through high pumping speed for air already starting at atmospheric pressure
- Hermetically tight
  - No shaft seals
  - No oil leakage
  - Safe pumping of toxic gases
- High reliability
  - Long service intervals (up to 5 years)
  - High uptime
  - Robust and durable design
- One motor solution
  - Multi-voltage, dual frequency motor operable at 200 V - 460 V and 50/60 Hz
- Easy and modular
  - Direct coupling of roots booster pumps without frames for models RUVAC WH 700 and WA(U)/WS(U) 251-1001




#### Typical Application

- Process industry
  - Industrial furnaces
  - Degassing
  - Charging
  - Casting
  - Drying processes
  - Freeze drying
  - Electron beam welding
  - Packaging
- Coating
  - PVD/CVD coating
  - Wear resistant coating
  - Optical coating
  - Web coating
  - Load locks/transfer chambers
- Solar
  - CVD/PECVD
  - Crystal pulling and casting
- Support functions
  - Regeneration of cryo pumps
  - Forevacuum pumps for turbomolecular pumps

#### Performance Details at a Glance

LEYVAC dry vacuum pumps provide **optimized**

- System uptime
  - Robust design based on the proven RUVAC and DRYVAC technology
  - Most effective cooling system
  - Thermal protection on board (for CC versions)
  - Tolerant to pressure shocks
  - Long intervals for bearing exchange
- Process safety
  - designed for harsh applications
- Performance data
  - High pumping speed already at high intake pressures
  - Good pumping speed also for lighter gases (with purge)
- Environmental properties
  - Low noise and low heat emission
- Price-to-performance ratio
  - Low investment costs
  - Small, price optimized pumping systems

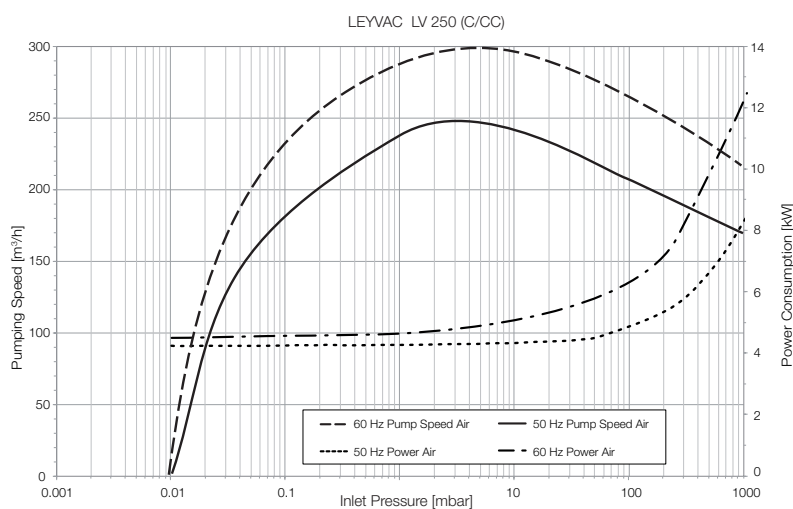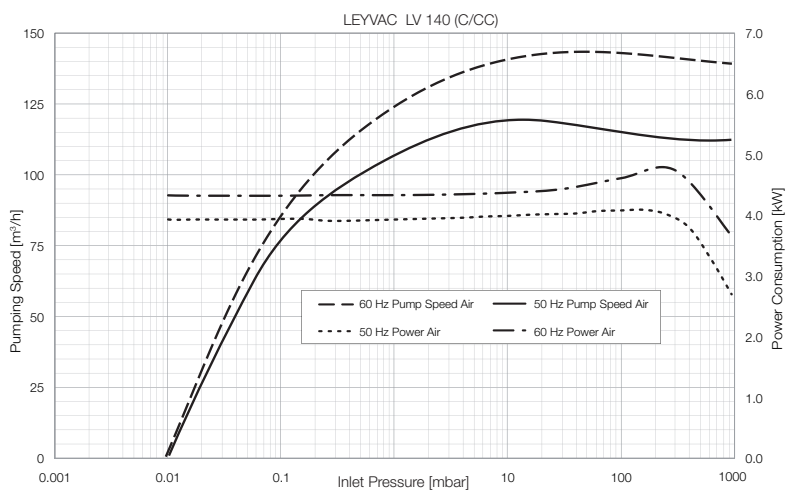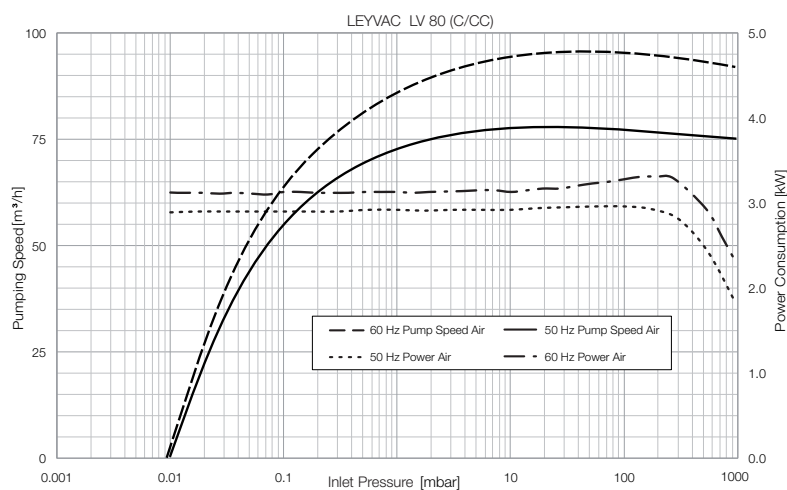

Pumping speed curves of the LEYVAC LV 80 (C/CC), LEYVAC LV 140 (C/CC) and LEYVAC LV 250 (C/CC)

## Technical Data

## LEYVAC

### LV 80 (C/CC)


### LV 140 (C/CC)

### LV 250 (C/CC)

Nominal pumping speed without gas ballast at 50/60 Hz				
m <sup>3</sup> x h <sup>-1</sup> (cfm)		80/96 (47.1/56.5)	125/145 (73.6/85.3)	250/300 (147.1/176.6)
Ultimate pressure with seal and rotor purge	mbar (Torr)	1 x 10 <sup>-2</sup> (0.75 x 10 <sup>-2</sup> )	1 x 10 <sup>-2</sup> (0.75 x 10 <sup>-2</sup> )	1 x 10 <sup>-2</sup> (0.75 x 10 <sup>-2</sup> )
Power consumption at ultimate pressure and 50/60 Hz operation	kW (hp)	2.9/3.2 (3.9/4.3)	3.9/4.3 (5.2/5.8)	4.2/4.7 (5.6/6.3)
Weight, approx.				
LV ...	kg (lbs)	280 (617)	300 (661)	330 (728)
LV ... C/CC	kg (lbs)	300 (661)	320 (705)	350 (772)
Noise level <sup>1)</sup>	dB(A)	< 65	< 65	< 72
Connection flange				
Intake	DN	63 ISO-K	63 ISO-K	63 ISO-K
Discharge	DN	40 ISO-KF	40 ISO-KF	40 ISO-KF
Mains voltage (± 10%)				
LV ...	V	200 - 460	200 - 460	200 - 460
LV ... C (with housing)	V	200 - 460	200 - 460	200 - 460
LV ... CC (with housing and Temperature monitoring)	V	380 - 460	380 - 460	380 - 460
Nominal power at 50/60 Hz	kW (hp)	4.1 (5.5)	5.5 (7.4)	8.0 (10.7)
Nominal current consumption 50/60 Hz at 400 V	A	6	8	16
Cooling		water/glycol	water/glycol	water/glycol
Cooling water temperature	°C (°F)	+15 to +30 (+59 to +86)	+15 to +30 (+59 to +86)	+15 to +30 (+59 to +86)
Min. cooling water throughput	l/min	3	3	3
Water vapor tolerance (with gas ballast)				
80 slm 50/60 Hz	mbar (Torr)	20/30	125/160	-/-
150 slm 50/60 Hz <sup>2)</sup>	mbar (Torr)	-/-	-/-	30/37
Water vapor capacity (with gas ballast)				
80 slm 50/60 Hz	kg/h	1.24/2.3	11.5/18.0	-/-
150 slm 50/60 Hz <sup>2)</sup>	kg/h	-/-	-/-	6.3/6.5
Permissible ambient temperature	°C (°F)	+5 to +45 (+41 to +113)	+5 to +45 (+41 to +113)	+5 to +45 (+41 to +113)
Protection class EN 60529	IP	54	54	54
Dimensions (W x H x D)				
LV ... and LV ... C	mm (in.)	814 x 375 x 550 (32.05 x 14.76 x 21.65)	895 x 400 x 567 (35.24 x 15.75 x 22.32)	1051 x 425 x 537 (41.38 x 16.73 x 21.14)
LV ... CC	mm (in.)	984 x 375 x 550 (38.74 x 14.76 x 21.65)	1065 x 400 x 567 (41.93 x 15.75 x 22.32)	1224 x 425 x 537 (48.19 x 16.73 x 21.14)

<sup>1)</sup> At ultimate pressure and with rigid exhaust line DIN EN ISO 2151

<sup>2)</sup> 2nd case: with 24 V gas ballast kit 115005A13 fitted to port 2, standard purge also opened

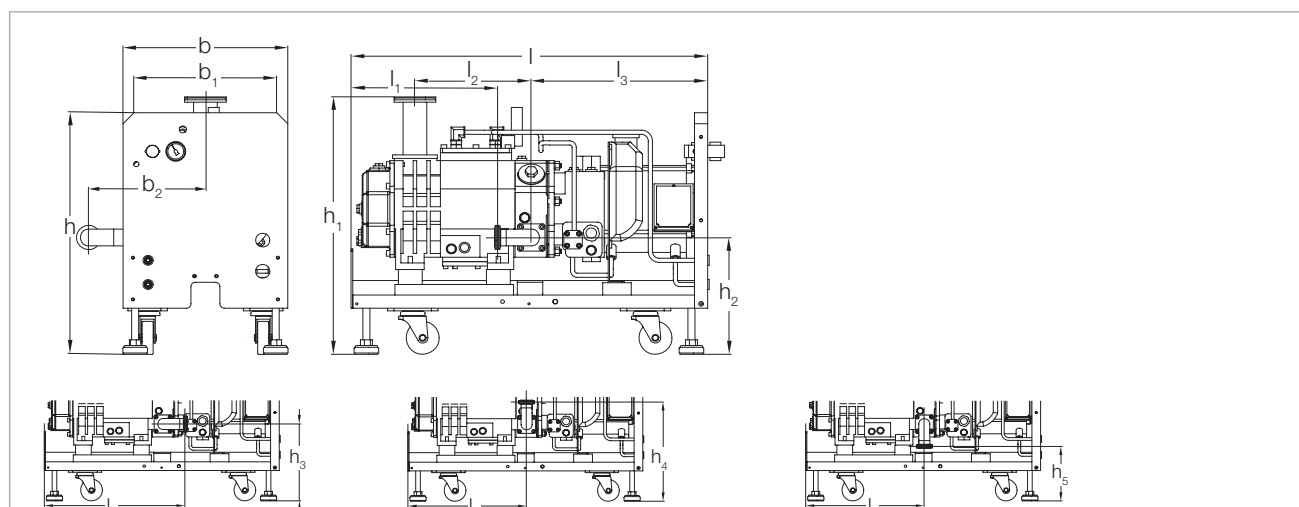

Type	b	b <sub>1</sub>	b <sub>2</sub>	h	h <sub>1</sub>	h <sub>2</sub>	h <sub>3</sub>	h <sub>4</sub>	h <sub>5</sub>	l (CC version)	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>
LV 80 (C)	mm 375	320	266	550	576	266	266	341	191	814 (984)	335	265	402	485	410
	in. 14.76	12.60	10.47	21.65	22.68	10.47	10.47	13.43	7.52	32.05 (38.74)	13.19	10.43	15.83	19.09	16.14
LV 140 (C)	mm 400	350	285	567	597	257	257	332	182	895 (1065)	364	297	453	514	439
	in. 15.75	13.78	11.22	22.32	23.50	10.12	10.12	13.07	7.17	35.24 (41.93)	14.33	11.69	17.84	20.24	17.28
LV 250 (C)	mm 425	375	285	537	570	230	230	305	155	1051 (1224)	512	420	464	662	587
	in. 16.73	14.76	11.22	21.14	22.44	9.06	9.06	12.01	6.01	41.38 (48.19)	20.16	16.54	18.27	26.06	21.93

Dimensional drawing for the LEYVAC LV 80/C and LV 140/C; below for exhaust connection



## Ordering Information

## LEYVAC

### LV 80 (C/CC)

### LV 140 (C/CC)

### LV 250 (C/CC)

	Part No.	Part No.	Part No.
Dry compressing vacuum pump LEYVAC including LEYBONOL LVO 410 lubricant, base plate, castors, temperature switch, shaft seal and rotor purge additionally with casing (C version) additionally with casing and temperature monitoring (CC version)	<b>115080V15</b> <b>115080V30</b> <b>115080V35</b>	<b>115140V15</b> <b>115140V30</b> <b>115140V35</b>	<b>115250V15</b> <b>115250V30</b> <b>115250V35</b>
<b>Accessories</b>			
Non-return ball valve	<b>115005A01</b>	<b>115005A01</b>	<b>115005A01</b>
Non-return valve, spring-loaded	<b>115005A02</b>	<b>115005A02</b>	<b>115005A02</b>
Roots pump adapter for RUVAC WS/WSU 251/501 and WH 700	<b>115005A03</b>	<b>115005A03</b>	<b>115005A05</b>
Adapter ring for RUVAC WA(U)/WS(U)1001	—	<b>115005A04</b> and <b>115005A03</b>	<b>115005A06</b> and <b>115005A05</b>
Exhaust pressure sensor			
LV 80	<b>115005A10</b>	—	—
LV 140	—	<b>115005A11</b>	—
LV 250	—	—	<b>115005A09</b>
Gas ballast kit manually operated 24 V	<b>115005A12</b> <b>115005A13</b>	<b>115005A12</b> <b>115005A13</b>	<b>115005A12</b> <b>115005A13</b>
Silencer			
standard			
(with integrated non-return valve)	<b>115005A20</b>	<b>115005A20</b>	<b>115005A20</b>
serviceable	<b>115005A22</b>	<b>115005A22</b>	<b>115005A22</b>
emptyable	<b>115005A23</b>	<b>115005A23</b>	<b>115005A23</b>
High-performance silencer	<b>115005A21</b>	<b>115005A21</b>	<b>115005A21</b>
Elbow for silencer, emptyable	<b>115005A26</b>	<b>115005A26</b>	<b>115005A26</b>
Inlet screen	<b>115005A28</b>	<b>115005A28</b>	<b>115005A28</b>
External frequency converter (including mains filter) for			
LEYVAC LV 80 (400 V)	<b>115005A30</b>	—	—
LEYVAC LV 140 (400 V)	—	<b>115005A35</b>	—
LEYVAC LV 250 (400 V)	—	—	<b>115005A40</b>
Profibus module <sup>1)</sup>	<b>155212V</b>	<b>155212V</b>	<b>155212V</b>
Relais module (digital output) <sup>1)</sup>	<b>112005A01</b>	<b>112005A01</b>	<b>112005A01</b>
Ethernet interface module <sup>1)</sup>	<b>112005A02</b>	<b>112005A02</b>	<b>112005A02</b>
ProfiNet module <sup>1)</sup>	<b>112005A35</b>	<b>112005A35</b>	<b>112005A35</b>
EtherCAT module <sup>1)</sup>	<b>112005A36</b>	<b>112005A36</b>	<b>112005A36</b>

<sup>1)</sup> For optional, external frequency converter



## Applications for SCREWLINE Pumps

Application	Dry Compressing Scroll Vacuum Pumps		SCREWLINE SP 250 (ATEX)	SCREWLINE 630 (F) ATEX
Laser engineering			■	■
Vacuum coating			■	■
Lamination			■	■
Loadlock chambers			■	■
Mechanical engineering			■	■
Automotive industry			■	■
Metallurgy/Furnaces			■	■
Crystal pulling			■	■
Degassing			■	■
Electrical engineering			■	■
Energy technology			■	■
Welding technology			■	■
Lamps/Tubes manufacture			■	■
Cooling and air conditioning			■	■
Chemistry/Pharmaceuticals			■	■
Chemical research laboratories			■	■
Vacuum drying			■	■
Freeze drying systems			■	■
Environmental engineering			■	■
Packaging			■	■
Medical technology			■	■
Analytical engineering			■	■
Research and development			■	■
Space simulation			■	■
Backing pump for HV-Systems			■	■

# Products




Pump system Screw Vacuum Pump SCREWLINE SP 630 with RUVAC WAU 2001

The Screw Vacuum Pumps SCREWLINE were developed in view of the special requirements of industrial applications. The innovative design allows these pumps to be used whenever reliable, compact and low maintenance vacuum solutions are required.

## Principle of Operation

Screw Vacuum Pumps are dry compressing backing pumps, the operation of which is based on the screw principle. The pumping chamber of the pump is formed by two synchronised positive displacement rotors and the housing enclosing these. Since the rotors rotate in opposite directions, the chambers move steadily from the intake to the exhaust side of the pumps thereby resulting in a smooth pumping action (see figure below). Since with a single Screw Vacuum Pump rotor pair a multistage compression process is implemented, the component count in the pumping path is very low. In this way maintenance and servicing work is much simplified.

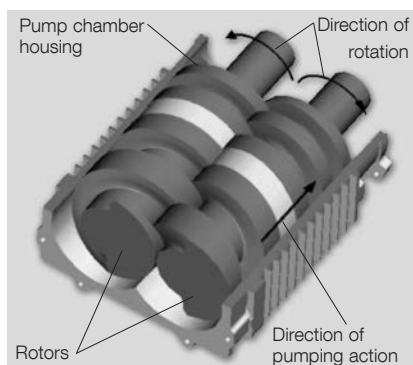

Principle of operation of the SCREWLINE Line

## Properties

The direct pumping path without multiple deflections for the medium make the Screw Vacuum Pumps highly insensitive to foreign materials. This ensures a high uptime in industrial processes.

The two non-contacting shaft-seals are practically wear-free, which allows for very long maintenance intervals. For standard applications no purge gas is required. However, a purge gas supply can be connected as an option to purge the seals, should the application process require this.

Because of the cantilevered bearing arrangement for the Screw Vacuum Pump rotors, a potential source of failure (i.e. a bearing on the intake side) is entirely eliminated. On the one hand, no lubricants from the bearings can enter into the vacuum process, and the other hand also an impairment of the bearing by aggressive process media can be excluded.

A further benefit of the cantilevered bearing arrangement is the easy

accessibility of the pump chamber. This innovative design feature allows the removal of the pump housing with out time-consuming and costly disassembly of the bearings. Thus on-site cleaning of all surfaces in contact with the medium is possible. In particular, if the processes involved considerable amounts of contaminants this is a significant advantage which ensures a long uptime.

The low exhaust temperature is an important advantage of the Screw Vacuum Pumps. Owing to the design of the screw rotors, a temperature of maximum 100 °C (212 °F) is attained inside the pump. Thus deposits of many substances are avoided which react at high temperatures. This makes the pump unique and many customers, above all from the field of coating, value this highly.

Should deposits form in spite of this, then the easy to disassemble housing facilitates rapid cleaning.

Besides the integrated oil cooling arrangement for the rotors, the Screw Vacuum Pumps are air-cooled from the outside. Here rotor and housings are thermally linked via the oil cooler. Thus, Screw Vacuum Pumps adapt themselves ideally to the ambient conditions under changing operating situations.



Oil/water cooling unit SP 630 F

A water-cooled version is offered as Screw Vacuum Pumps SP 630 F. This product version is intended for operation in air-conditioned rooms.

The Screw Pumps portfolio is completed through ATEX-certified variants.

Moreover, the Screw Vacuum Pumps portfolio also includes pump versions suited for pumping pure oxygen ( $O_2$ ).

## Maintenance and Monitoring

During the development of the Screw Vacuum Pumps, special emphasis was placed on a particularly simple maintenance concept. This has been implemented through the cantilevered bearing arrangement, with all maintenance components and controls having been located on the so-called service side for easy accessibility. Thus, the space requirement which needs to be taken into account during planning has been optimized. The lower space requirement gives the user more flexibility during installation of the pump.

The monitoring system SP-GUARD was developed especially for constant real-time monitoring of the operational status of the Screw Vacuum Pumps. The operating parameters are con-


stantly acquired and processed. This enables the user to introduce preventive actions early enough so as to ensure trouble-free operation of his Screw Vacuum Pumps. The key current operating parameters can be read off from a local display. Moreover, connection to a PLC and remote monitoring is possible. Maintenance of the Screw Vacuum Pumps will generally be limited to a regular visual inspection of the pump and the annual change of gear oil and oil filter. The oil fill ports as well as the filters are readily accessible and can be easily exchanged.

With the aid of a flushing kit (optional) it is possible to clean the pump chamber, while the pump is operating without process. Deposits due to the process can thus be removed effectively and quickly without the need of having to disassemble the housing.

Also, cleaning of the air/oil heat exchanger can be done simply on-site by blowing out the heat exchanger with compressed air.

## Accessories

Screw Vacuum Pumps offer to the user a high degree of flexibility. Inlet and exhaust connections are made through universal flanges, respectively clamped flanges, permit simple integration within the system. Through the accessories which are available, the pump can be optimally adapted to the individual requirements of differing applications.

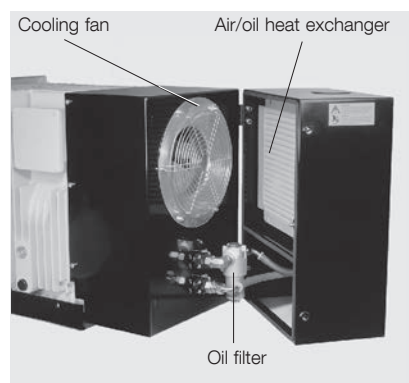


Oil/water cooling unit SP 630

## Advantages to the User

- Utmost reliability
- Protection of the pump through monitoring vital parameters by means of the SP-GUARD
- Minimum downtimes owing to rapid cleaning of the pump chamber (in less than one hour)
- Avoidance of deposits through low internal temperatures
- Minimum operating costs
- The only directly air cooled screw vacuum pump on the market. No need for cooling water
- No seal gas needed for standard applications
- No oil in the pump chamber. Thus no need for disposing of contaminated oil
- Gear oil change only every two years
- Utmost flexibility
- Direct adaptation of RUVAC pumps for increased pumping speed up to approximately 7000 m<sup>3</sup>/h
- Multi-flange for all commonly used pipe connections
- Flushing kit for constant cleaning of the pump chamber
- Silencing hoods for a further reduction of noise emissions

## Typical Applications

- Industrial furnaces
- Coating technology
- Load lock chambers
- Metallurgical systems
- Packaging technology
- Drying processes
- Degassing
- Research and development
- Lamps and tubes manufacture
- Automotive industry
- Packaging industry
- Space simulation
- Electrical engineering
- Energy research

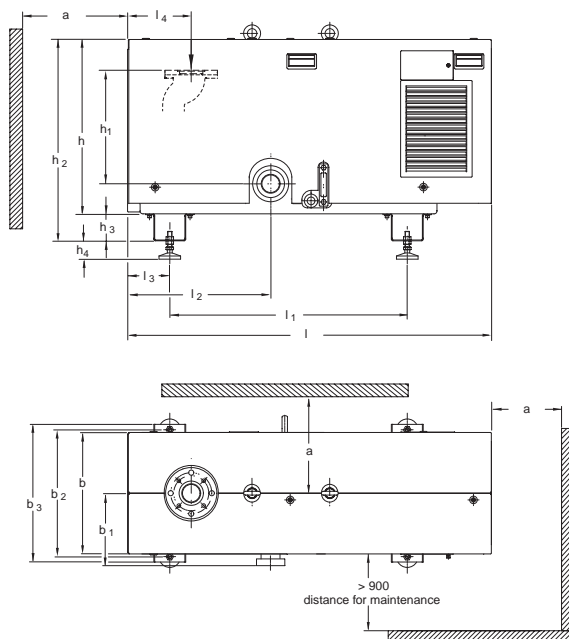

	a	b	b <sub>1</sub>	b <sub>2</sub>	b <sub>3</sub>
mm	> 500	450	268	470	510
in.	> 19.69	17.72	10.55	18.50	20.08


  

	h	h <sub>1</sub>	h <sub>2</sub>	h <sub>3</sub>	h <sub>4</sub>
mm	646	385	746	100	68 - 75
in.	25.43	15.16	29.37	3.94	2.68 - 2.95

	l	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>
mm	1348	880	529	156	236
in.	53.08	34.65	20.83	6.14	9.29

Dimensional drawing for the SCREWLINE SP 250

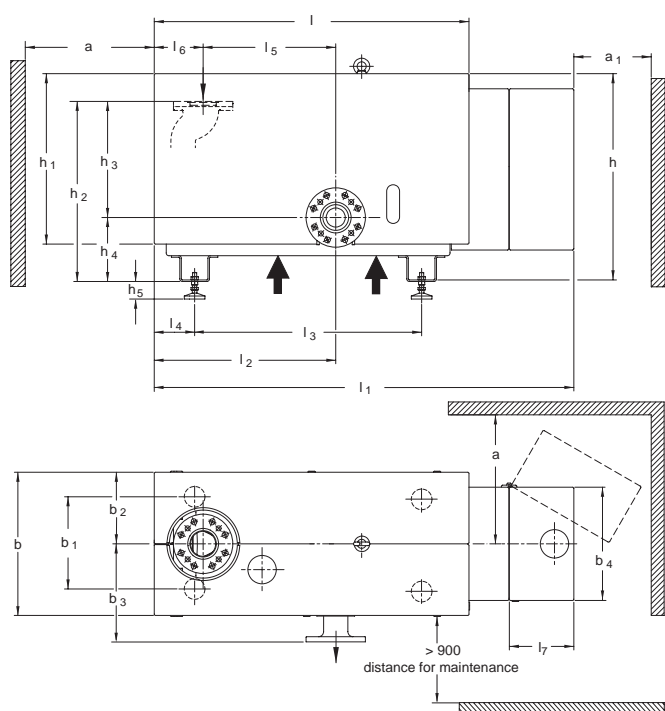

	a	a <sub>1</sub>	b	b <sub>1</sub>	b <sub>2</sub>	b <sub>3</sub>	b <sub>4</sub>
mm	> 500	> 300	555	470	276	380	439
in.	> 19.69	> 11.81	21.85	18.50	10.87	14.96	17.28


  

	h	h <sub>1</sub>	h <sub>2</sub>	h <sub>3</sub>	h <sub>4</sub>	h <sub>5</sub>	l
mm	806	636	698	450	248	68	1220
in.	31.73	25.04	27.48	17.72	9.76	2.68	48.03


  

	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>	l <sub>6</sub>	l <sub>7</sub>
mm	1626	703	880	157	514	189	250
in.	64.02	27.68	34.65	6.18	20.24	7.44	9.84

Dimensional drawing for the SCREWLINE SP 630

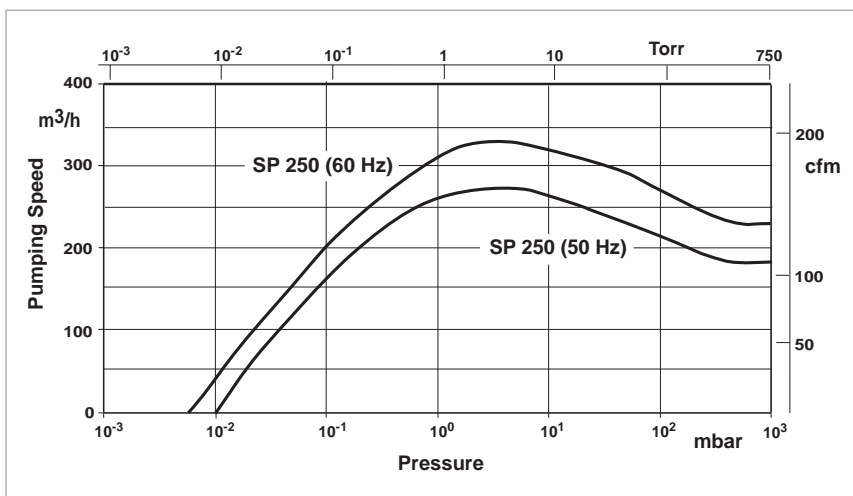

Effective pumping speed of the SCREWLINE SP 250 for air, without gas ballast (50/60 Hz)

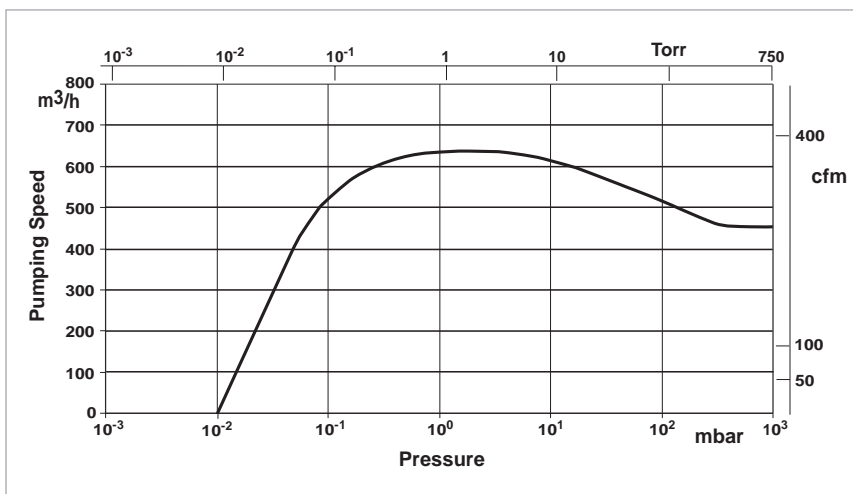

Effective pumping speed of the SCREWLINE SP 630 for air, without gas ballast

## Technical Data

## SCREWLINE SP 250

		50 Hz	60 Hz
Effective pumping speed	$\text{m}^3 \times \text{h}^{-1}$ (cfm)	270 (157)	330 (194)
Ultimate pressure, total	mbar (Torr)	$\leq 0.01$ ( $\leq 0.0075$ )	$\leq 0.005$ ( $\leq 0.0038$ )
Permissible intake pressure, max.	mbar (Torr)	1030 (773)	1030 (773)
Maximum exhaust pressure with reference to the ambient pressure		$p_{\text{ex}} = p_{\text{amb}} + 200 \text{ mbar (150 Torr)}$ $- 50 \text{ mbar ( 37 Torr)}$	$p_{\text{ex}} = p_{\text{amb}} + 200 \text{ mbar (150 Torr)}$ $- 50 \text{ mbar ( 37 Torr)}$
Permissible ambient temperature	°C (°F)	+10 to +40 (+50 to +104)	+10 to +40 (+50 to +104)
Water vapour tolerance (with gas ballast)	mbar (Torr)	60 (45)	75 (56)
Water vapour capacity (with gas ballast)	$\text{kg} \times \text{h}^{-1}$ (gal $\times \text{h}^{-1}$ )	10 (2.7)	18 (4.9)
Installation location		up to 3000 metres (9.800 feet) (above sea level)	up to 3000 metres (9.800 feet) (above sea level)
Cooling		Air	Air
Power supply at operating voltage	$\Delta\Delta$ $\Delta$	32.0 A / 200 V (cos phi 0.88) 16.0 A / 400 V (cos phi 0.88)	31.5 A / 210 V (cos phi 0.88) 15.5 A / 460 V (cos phi 0.88)
Nominal power	kW (HP)	7.5 (10.0)	7.5 (10.0)
Power consumption at ultimate pressure	kW (HP) kW (HP)	5.9 (8.0) at 3-ph. 200 V / 400 V 6.5 (8.8) at 3-ph. 500 V	7.2 (9.8) at 3-ph. 200 V / 400 V –
Energy efficiency class		IE 2	IE 2
Motor rotational speed	rpm	2920	3505
Type of protection	IP	55	55
Thermal protection class		F	F
Lubricant filling (LVO 210)	l	7	7
Intake flange, standard Clamping flange Bolt flange Bolt flange		ISO 1609-1986 (E)-63 (DN 63 ISO-K) <sup>1)</sup> ASME B 16.5 NPS 3 class 150 EN 1092-2-PN 6 - DN 65	ISO 1609-1986 (E)-63 (DN 63 ISO-K) <sup>1)</sup> ASME B 16.5 NPS 3 class 150 EN 1092-2-PN 6 - DN 65
Exhaust flange, standard Clamping flange		ISO 1609-1986 (E)-63 (DN 63 ISO-K)	ISO 1609-1986 (E)-63 (DN 63 ISO-K)
Exhaust flange, optional Clamping flange Bolt flange Bolt flange Bolt flange		ISO 1609-1986 (E)-63 (DN 63 ISO-K) <sup>1)</sup> ASME B 16.5 NPS 3 class 150 EN 1092-2-PN 16 - DN 65 EN 1092-2-PN 6 - DN 65	ISO 1609-1986 (E)-63 (DN 63 ISO-K) <sup>1)</sup> ASME B 16.5 NPS 3 class 150 EN 1092-2-PN 16 - DN 65 EN 1092-2-PN 6 - DN 65
Materials (components in contact with the gas)		Aluminum, aluminum anodic oxidised, C steel, CrNi steel, grey cast-iron, FPM (FKM) (Viton))	Aluminum, aluminum anodic oxidised, C steel, CrNi steel, grey cast-iron, FPM (FKM) (Viton))
Weight, approx.	kg (lbs)	450 (992)	450 (992)
Dimensions (W x D x H)	mm (in.)	1350 x 530 x 880 (53.1 x 20.9 x 34.6)	1350 x 530 x 880 (53.1 x 20.9 x 34.6)
Noise level <sup>2)</sup>	dB(A)	67	72

<sup>1)</sup> This flange is required when ISO-K flanges are to be connected (Part No. 267 47)

<sup>2)</sup> With connected exhaust gas line at ultimate pressure



## Ordering Information

## SCREWLINE SP 250

	Standard	ATEX	O <sub>2</sub>
	Part No.	Part No.	Part No.
Screw Vacuum Pump SP 250 (50/60 Hz) with manual gas ballast	<b>115 001</b> <sup>1)</sup>	–	–
with purge gas unit, castors and manual gas ballast valve	<b>115 006</b> <sup>1)</sup>	–	–
with electromagnetic gas ballast and purge gas unit Category 3GD IIC 160 °C (320 °F) inside	–	<b>115 003</b> <sup>1, 2)</sup>	–
with electromagnetic gas ballast Purge vent vit, FFPM gaskets and purge gas unit Category 2G3D b IIC 135 °C (275 °F) inside/ Category 3GD Ex nA IIC 160 °C (320 °F) outside, (50 Hz only)	–	<b>115 012V</b> <sup>1)</sup>	–
with electromagnetic gas ballast and purge gas unit SP-GUARD	–	–	<b>115 019</b> <sup>1), 3)</sup>
<b>Accessories</b>			
Exhaust silencer	<b>119 002</b>	<b>119 002</b>	<b>119 002</b>
Serviceable silencer	<b>119 003V</b>	<b>119 003V</b>	<b>119 003V</b>
Exhaust non-return valve (DN 65 PN 6)	<b>119 011</b>	–	–
Solenoid gas ballast kit, 24 V <sup>4)</sup>	<b>119 054V</b>	–	–
Adaptor for RUVAC 501/1001	<b>119 022</b>	<b>119 022</b>	<b>119 022</b>
Purge gas retrofit kit	<b>119 031</b>	–	–
Inlet filter adapter DN 63 ISO-K	<b>119 019</b>	<b>119 019</b>	–
Dust filter	<b>951 68</b>	–	–
Purge vent kit	<b>119 061V</b>	<b>119 061V</b>	<b>119 061V</b>
Oil change kit	<b>EK 110 000 820</b>	<b>EK 110 000 820</b>	<b>EK 110 000 820</b>
Screw inspection kit	<b>EK 110 000 821</b>	<b>EK 110 000 821</b> <sup>5)</sup>	<b>EK 110 000 821</b>
Purge gas connection servicing kit	<b>EK 110 000 834</b>	<b>EK 110 000 834</b>	<b>EK 110 000 834</b>
Filter for gas ballast	<b>E 110 000 980</b>	<b>E 110 000 980</b>	<b>E 110 000 980</b>
Filter for purge gas valve unit	<b>E 110 000 850</b>	<b>E 110 000 850</b>	<b>E 110 000 850</b>
Absorbing felt	<b>E 110 002 435</b>	<b>E 110 002 435</b>	<b>E 110 002 435</b>
Silencer service kit	<b>EK 500 003 476</b>	<b>EK 500 003 476</b>	<b>EK 500 003 476</b>
Seal kit non-return valve SP 250	<b>EK 110 000 828</b>	<b>EK 110 000 828</b>	<b>EK 110 000 828</b>
Seal kit RUVAC adaptor SP 250	<b>EK 110 000 835</b>	<b>EK 110 000 835</b>	<b>EK 110 000 835</b>
Vibration element RUVAC adaptor SP 250	<b>ES 110 000 2677</b>	<b>ES 110 000 2677</b>	<b>ES 110 000 2677</b>

<sup>1)</sup> All pumps are equipped as standard with an SP-GUARD

<sup>2)</sup> Only ATEX Category 3i (Directive 94/9/EG)

<sup>3)</sup> T4 with max.  $p_{ex} = p_{amb} + 200 \text{ mbar}$   
– 50 mbar

<sup>4)</sup> This accessory item can only be used beginning with SN (serial number) 31000530865

<sup>5)</sup> Only for Part No.

For all enquiries and orders relating to category 1 and 2 ATEX products please exclusively use our ATEX questionnaire. You can find this questionnaire at the end of the full-line catalog together with the fax forms or on the Internet under "www.leybold.com" under Download Documents in the area Documentation.

## SCREWLINE SP 630

### Technical Data

#### 50 Hz

#### 60 Hz

Effective pumping speed	$\text{m}^3 \times \text{h}^{-1}$ (cfm)	630 (371)	630 (371)
Ultimate total pressure	mbar (Torr)	$\leq 0.01$ ( $\leq 0.0075$ )	$\leq 0.01$ ( $\leq 0.0075$ )
Intake pressure limits, max.	mbar (Torr)	1030 (773)	1030 (773)
Maximum exhaust pressure with reference to the ambient pressure		$p_{\text{ex}} = p_{\text{amb}} + 200 \text{ mbar (150 Torr)}$ $- 50 \text{ mbar (37 Torr)}$	$p_{\text{ex}} = p_{\text{amb}} + 200 \text{ mbar (150 Torr)}$ $- 50 \text{ mbar (37 Torr)}$
Permissible ambient temperature	°C (°F)	+10 to +40 (+50 to +104)	+10 to +40 (+50 to +104)
Water vapour tolerance (with gas ballast)	mbar (Torr)	40 (30)	40 (30)
Water vapour capacity (with gas ballast)	$\text{kg} \times \text{h}^{-1}$ (gal $\times \text{h}^{-1}$ )	14 (3.7)	14 (3.7)
Installation location		up to 3000 metres (9.800 feet) (above sea level)	up to 3000 metres (9.800 feet) (above sea level)
Cooling		Air	Air
Power supply	$\Delta\Delta$ $\Delta^{1)}$ Y	56 A / 200 V 28 A / 400 V 16 A / 690 V	52 A / 210 V 24 A / 460 V –
$\cos \varphi$		0.89	0.90
Nominal power	kW (HP)	15 (20)	15 (20)
Power consumption at ultimate pressure	kW (HP)	< 11 (< 15)	< 11 (< 15)
Energy efficiency class		IE 2	IE 2
Motor rotational speed	rpm	2930	3530
Type of protection	IP	55	55
Thermal protection class		F	F
Lubricant filling (LVO 210)	l	13	13
Intake flange and exhaust flange compatible with bolt flanges		EN 1092-2 - PN 6 - DN 100 EN 1092-2 - PN 16 - DN 100 ISO 1609-1986 (E)-100 (DN 100 ISO-K) <sup>2)</sup> ASME B 16.5 NPS4 class 150	EN 1092-2 - PN 6 - DN 100 EN 1092-2 - PN 16 - DN 100 ISO 1609-1986 (E)-100 (DN 100 ISO-K) <sup>2)</sup> ASME B 16.5 NPS4 class 150
Materials (components in contact with the gas)		Aluminum, aluminum anodic oxidised, C steel, CrNi steel, grey cast-iron, FPM (FKM) (Viton))	Aluminum, aluminum anodic oxidised, C steel, CrNi steel, grey cast-iron, FPM (FKM) (Viton))
Weight, approx.	kg (lbs)	530 (1166)	530 (1166)
Dimensions (W x D x H)	mm (in.)	1630 x 660 x 880 (64 x 26 x 35)	1630 x 660 x 880 (64 x 26 x 35)
Noise level <sup>3)</sup>	dB(A)	73	75

<sup>1)</sup> 690 V upon request

<sup>2)</sup> This flange is required when ISO-K flanges are to be connected (Part No. 267 50)

<sup>3)</sup> With connected exhaust gas line at ultimate pressure

## SCREWLINE SP 630 F

### Additional Technical Data

#### 50 Hz

#### 60 Hz

Cooling		Water	Water
Water connection	G	1/2" ISO 228-1	1/2" ISO 228-1
Water temperature	°C (°F)	+5 to +35 (+41 to +95)	+5 to +35 (+41 to +95)
Minimum water feed pressure	bar (psi, gauge)	2 (15)	2 (15)
Nominal flow at a water feed temperature of 25° C (77 °F)	l/min (gal/min)	12 (3)	12 (3)
Noise level <sup>1)</sup>	dB(A)	71	71

<sup>1)</sup> With connected exhaust gas line at ultimate pressure

**Ordering Information****SCREWLINE SP 630 Standard / SP 630 F Standard**

	<b>50 Hz</b>	<b>60 Hz</b>
	<b>Part No.</b>	<b>Part No.</b>
Screw Vacuum Pump SP 630 air cooled, with manual gas ballast	<b>117 007</b>	<b>117 008</b>
Screw Vacuum Pump SP 630 F water cooled, with adapter for RUVAC 2001 and electromagnetic gas ballast	<b>117 105</b>	<b>117 106</b>
with manual gas ballast	<b>117 107</b>	<b>117 108</b>
with purge gas kit and manual gas ballast	<b>117 113</b>	<b>117 114</b>
Screw Vacuum Pump SP 630 S1 water cooled, with castors, purge gas kit and electromagnetic gas ballast	<b>117 117</b>	<b>117 118</b>

Dry Compressing  
Vacuum Pumps

All pumps are equipped as standard with an SP-GUARD

**Ordering Information****SCREWLINE SP 630 ATEX / SP 630 F ATEX**

	<b>50 Hz</b>	<b>60 Hz</b>
	<b>Part No.</b>	<b>Part No.</b>
Screw Vacuum Pump SP 630 with purge gas kit manual gas ballast and air cooled, Category 3G IIC (160 °C (320 °F)) inside	<b>117 017</b>	<b>117 018</b>
with purge gas kit 24 V gas ballast and water cooled, Category 3G IIC (160 °C (320 °F)) inside	<b>117 115</b>	<b>117 116</b>
Screw Vacuum Pump SP 630 F water cooled Category 2G3D IIC (160 °C (320 °F)) Category 3G IIC T3 (160 °C (320 °F)) with purge gas monitor, adapter for RUVAC 2001 and electromagnetic gas ballast	<b>117 111</b>	<b>117 112</b>

All pumps are equipped as standard with an SP-GUARD

For all enquiries and orders relating to category 1 and 2 ATEX products please exclusively use our ATEX questionnaire.  
You can find this questionnaire at the end of the full-line catalog together with the fax forms or  
on the Internet under "www.leybold.com" under Download Documents in the area Documentation.

**Ordering Information****SP 630 O<sub>2</sub>**

	<b>50 Hz</b>	<b>60 Hz</b>
	<b>Part No.</b>	<b>Part No.</b>
Screw Vacuum Pump SP 630 with purge gas monitor and electromagnetic gas ballast	<b>117 039</b>	<b>117 040</b>

All pumps are equipped as standard with an SP-GUARD

## Ordering Information

## SCREWLINE SP 630 Standard / SP 630 F Standard

### Accessories

### 50 Hz / 60 Hz

	Part No.
Exhaust silencer	<b>119 001</b>
Serviceable silencer	<b>119 004V</b>
Roots pump adapter for RUVAC 1001 <sup>1)</sup> for RUVAC 2001 for RUVAC WH(U) 2500 for RUVAC WH 4400	<b>500 003 173</b> <b>119 021</b> <b>155222V</b> <b>119 024V</b>
Dust filter <sup>2)</sup> Elbow 90° (DN 100 ISO-K) Clamping screws for DN 63-250 ISO-K Centering ring for DN 100 ISO-K	<b>951 72</b> <b>887 26</b> <b>267 01</b> <b>268 06</b>
Purge vent Kit	<b>119 060V</b>
Inlet filter adapter DN 100 ISO-K	<b>119 020</b>
Solenoid gas ballast kit, 24 V from serial number 31000530865	<b>119 054V</b>
Non-return valve (DN 100 PN 6)	<b>119 010</b>
Purge gas retrofit kit <sup>3)</sup>	<b>119 030</b>
Maintenance kit, level 1 (oil change kit) up to serial number 31000197911 from serial number 31000197911	<b>EK 110 000 792</b> <b>EK 110 000 832</b>
Maintenance kit, level 2 (rotor inspection kit)	<b>EK 110 000 793</b>
Purge gas connection servicing kit	<b>EK 110 000 827</b>
Filter for gas ballast	<b>E 110 000 980</b>
Filter for purge gas valve unit	<b>E 110 000 850</b>
Water filter maintenance kit for SP 630 F	<b>EK 110 000 813</b>
Silencer service kit	<b>EK 500 003 475</b>
Seal kit for SP 630 check valve	<b>EK 110 000 815</b>

<sup>1)</sup> Must mount to adapter Part No. 119 021

<sup>2)</sup> For information on the dust filter please refer to the Catalog Part "Oil sealed Vacuum Pumps", Section "SOGEVAC", Chapter "Accessories"

<sup>3)</sup> Not for ATEX pumps



## Applications for DRYVAC Pumps

Pumps	DRYVAC DV 450	DRYVAC DV 450 S	DRYVAC DV 450 C	DRYVAC DV 650	DRYVAC DV 650-r	DRYVAC DV 650 S	DRYVAC DV 650 S-i	DRYVAC DV 650 C	DRYVAC DV 650 C-r	DRYVAC DV 650 C-i	DRYVAC DV 1200	DRYVAC DV 1200 S-i	DRYVAC DV 5000 C-i
<b>Application</b>													
Automotive industry	■			■	■					■			
Electrical engineering	■			■	■					■			
Energy technology			■	■	■		■	■	■	■			
Degassing	■			■	■					■			
Research and development	■		■	■	■		■	■	■	■		■	
Freeze drying	■		■	■	■		■	■	■	■		■	
Industrial gases	■		■	■	■		■	■		■			
Refrigeration and air conditioning	■			■	■					■			
Crystal pulling/casting	■		■	■	■		■	■	■	■		■	
Lamination	■			■	■		■	■	■	■		■	
Leak testing machines	■	■		■	■	■	■			■	■		
Loadlock chambers		■				■	■				■		
Metallurgy/Furnaces	■			■	■					■			
Plasma cleaning or activation	■		■	■	■		■	■	■	■		■	
Welding technology	■	■		■	■	■	■			■	■		
Sterilization			■				■	■	■			■	
Vacuum coating			■				■	■	■			■	
Vacuum drying	■	■		■	■	■	■			■	■		
Packaging	■			■	■					■			
Space simulation	■			■	■					■			
Wind turbines	■			■	■					■			
Backing pump for Highvacuum systems	■			■	■					■			

# Oil for DRYVAC pumps for different fields of application

Applications	Automotive industry	Electrical engineering	Energy technology	Degassing	Research and development	Freeze drying	Industrial gases	Refrigeration and air conditioning	Crystal pulling/casting	Lamination	Leak testing machines	Loadlock chambers	Plasma cleaning or activation	Welding technology	Sterilization	Vacuum coating	Vacuum drying	Packaging	Space simulation	Wind turbines	Backing pump for	Highvacuum systems
<b>LEYBONOL Oils</b>																						
LVO 210	■	■	■	■	■	■	■	●	●	■		■	■	■	■	■	■	■				
LVO 410			●		●	●	■	■	●	■					■		●	●	■		■	

- = Standard
- = Possible

The table only lists general applications. Your specific requirements might be subject to deeper analysis.  
For further questions, please contact our technical Sales support.

**For information on oil specifications please refer to Catalog Part  
"Oils / Greases / Lubricants LEYBONOL®".**

## Oil for DRYVAC pumps for different pump types

Pumps	DRYVAC DV 450	DRYVAC DV 450 S	DRYVAC DV 450 C	DRYVAC DV 650	DRYVAC DV 650-r	DRYVAC DV 650 S	DRYVAC DV 650 S-i	DRYVAC DV 650 C	DRYVAC DV 650 C-r	DRYVAC DV 650 C-i	DRYVAC DV 1200	DRYVAC DV 1200 S-i	DRYVAC DVR 5000 C-i
<b>LEYBONOL Oils</b>													
LVO 210	■		■	■						■			
LVO 410		■	■			■	■	■	■	■		■	■

■ = Standard

The table only lists general applications. Your specific requirements might be subject to deeper analysis.  
For further questions, please contact our technical Sales support.

**For information on oil specifications please refer to Catalog Part  
"Oils / Greases / Lubricants LEYBONOL®".**



# Products

## DRYVAC DV 450 to DVR 5000 C-i



DRYVAC series

### The Benefits of the Screw Principle



The direct pumping path without multiple deflections of the gas makes the DRYVAC vacuum pumps very insensitive to foreign materials. This ensures a high reliability in industrial processes. The straight and short path for the gas from the inlet of the pump to its exhaust reduces the dwell time of the gas and thereby reduces potential deposits within the pump. Through the use of a purge gas (e.g. gas ballast), any deposits, particles and condensates can be effectively removed.

Just like the Screw Vacuum Pump SP, the DRYVAC was developed for demanding applications. However, the range of applications is extended by the DRYVAC to include numerous photovoltaic and display production processes. A unique characteristic of the Screw Vacuum Pump series SCREWLINE is the availability of air cooling and the low internal surface temperatures allowing applications like lamination, for example, to be run with long uptimes and low maintenance complexity.

DRYVAC is a new family of dry compressing screw vacuum pumps available with different features depending on the specific application. The DRYVAC family was developed in consideration of the special requirements of the photovoltaic, display and process industries. All DRYVAC variants are water cooled, very compact and easy to combine into systems, in particular with the well-proven Roots pumps of the RUVAC WH, WS and WA series.

Dry Compressing  
Vacuum Pumps

### Certifications



## The Best DRYVAC for every Application

The DRYVAC standard version and the DRYVAC DV S deliver an optimized pumping speed also pressures exceeding 100 mbar. DV and DV S types are suited for short cycle operation (load locks, for example) or for the evacuation of large vacuum chambers.

The DRYVAC pumps are equipped with all features necessary for process industry applications (gas ballast, for example).

The DRYVAC DV C models offer reliability in connection with harsh processes. They have been optimized for pumping media typically employed in photovoltaic and flat screen production processes. The DRYVAC DV C offers a high pumping speed for hydrogen and owing to its integrated purge gas system is insensitive to dust.

Main features and customer benefits offered by the DRYVAC are the compact design, the low-profile and the option of being able to easily build horizontally arranged pump systems and the power consumption reduced by up to 30% compared to screw pumps of the 630 m<sup>3</sup>/h pumping speed class.

These DRYVAC variants are available in different configuration levels: In the case of the DRYVAC-r the frequency converter has been designed for integration within an external electrical cabinet whereas in the case of the other variants the frequency converter has been integrated within the pump. The DRYVAC-i versions expand the DRYVAC by a PLC with a touch screen display and a software user interface allowing easy operation and configuration. The S-i versions are linked to the system as standard through a Profibus or a 24 V I/O interface (other interfaces upon request). Additionally, the S-i versions are accommodated in a full enclosure with castors, height adjustable feet and Harting socket.

The DRYVAC DV 450 and DV 650 pumps are equipped with one screw pumping stage, the DRYVAC 1200 is equipped with two pump stages running in parallel.

The DRYVAC DVR 5000 C-i is a special variant of the DRYVAC-i. This process pump is an autonomously controlled combination consisting of a DRYVAC DV 650 C screw pump and a new member of the RUVAC WH series, the WH 2500. Just like the screw pump, the RUVAC is also operated and controlled by a frequency converter (100 Hz max.) The effective pumping speed of the combination amounts to approximately 3800 m<sup>3</sup>/h for nitrogen.

## Design Features of the DRYVAC Family

- Water cooled
- Hermetically sealed screw and Roots pumps, static seals only towards the outside
- Simple mechanical and electrical integration
- Integrated protection function via temperature, exhaust pressure and current consumption
- Small footprint
- Low energy consumption due to optimized rotor geometry and innovative motor design meeting IE2 efficiency class requirements
- Wide voltage and frequency range: 380-460 V, 50/60 Hz
- NRTL certified

## Typical Applications

- Solar coating (SiN, ZnO, a-Si/μ-Si, CdTe, CIS/CIGS, etc.)
- Load lock
- Polysilicon production
- Display and glass coating
- Wear protection coating
- Strip coating
- Furnaces
- Metallurgy
- Vacuum drying
- Electron beam welding
- Food & Packaging

## The Benefits at a Glance

Most compact dry pump, with the smallest footprint for pump systems


- Optimized Cost of Ownership including the lowest power consumption available on the market today
- Utmost package flexibility
- Low noise level
- Highest reliability
- Integrated self-monitoring and control
- No unscheduled down times, minor maintenance demands


## The DRYVAC series

comprises the models


- DRYVAC DV 450
- DRYVAC DV 450-r
- DRYVAC DV 450-i
- DRYVAC DV 650
- DRYVAC DV 650-i
- DRYVAC DV 650-r
- DRYVAC DV 650 Atex Kat. 2
- DRYVAC DV 1200
- DRYVAC DV 1200 S-i
- DRYVAC DV 1200 Atex Kat. 2
- DRYVAC DVR 5000-i
- DRYVAC DVR 5000 C-i
- DRYVAC DVR 5000 S-i

and allows for numerous combinations with Roots pumps from the RUVAC series.

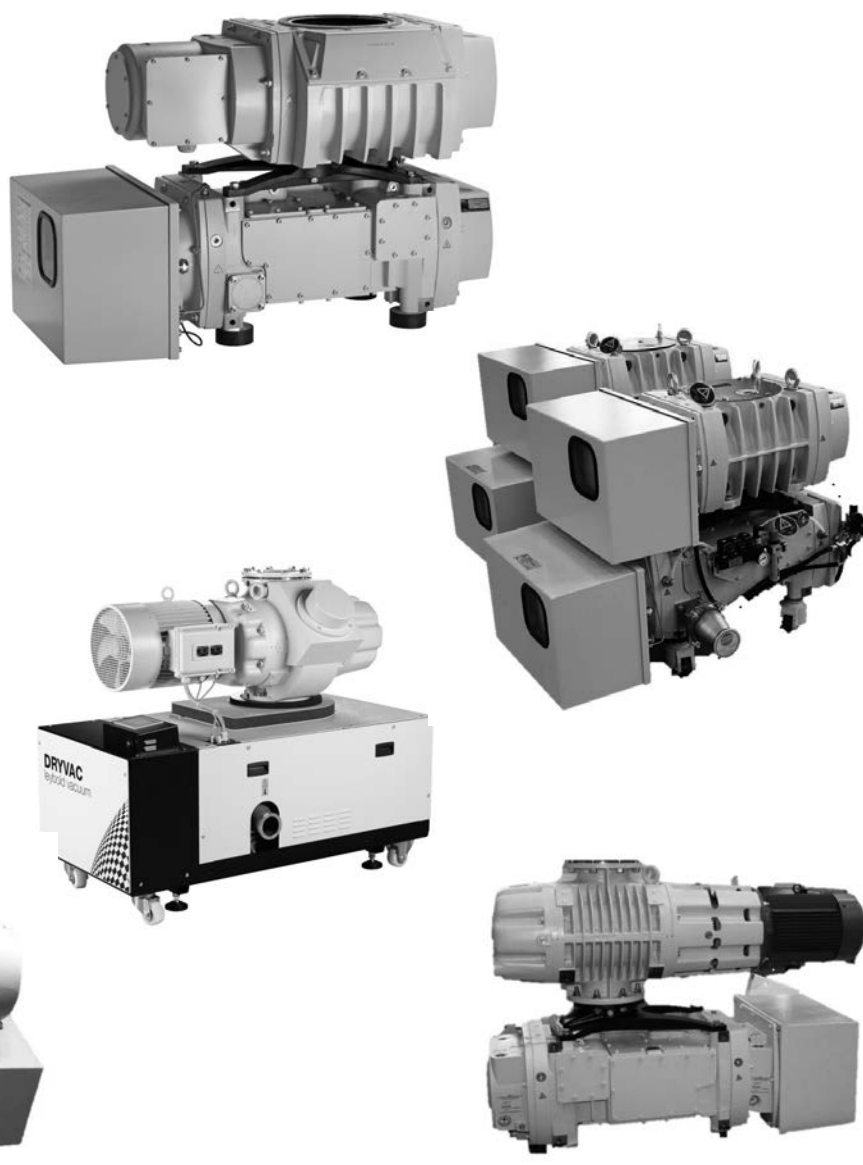


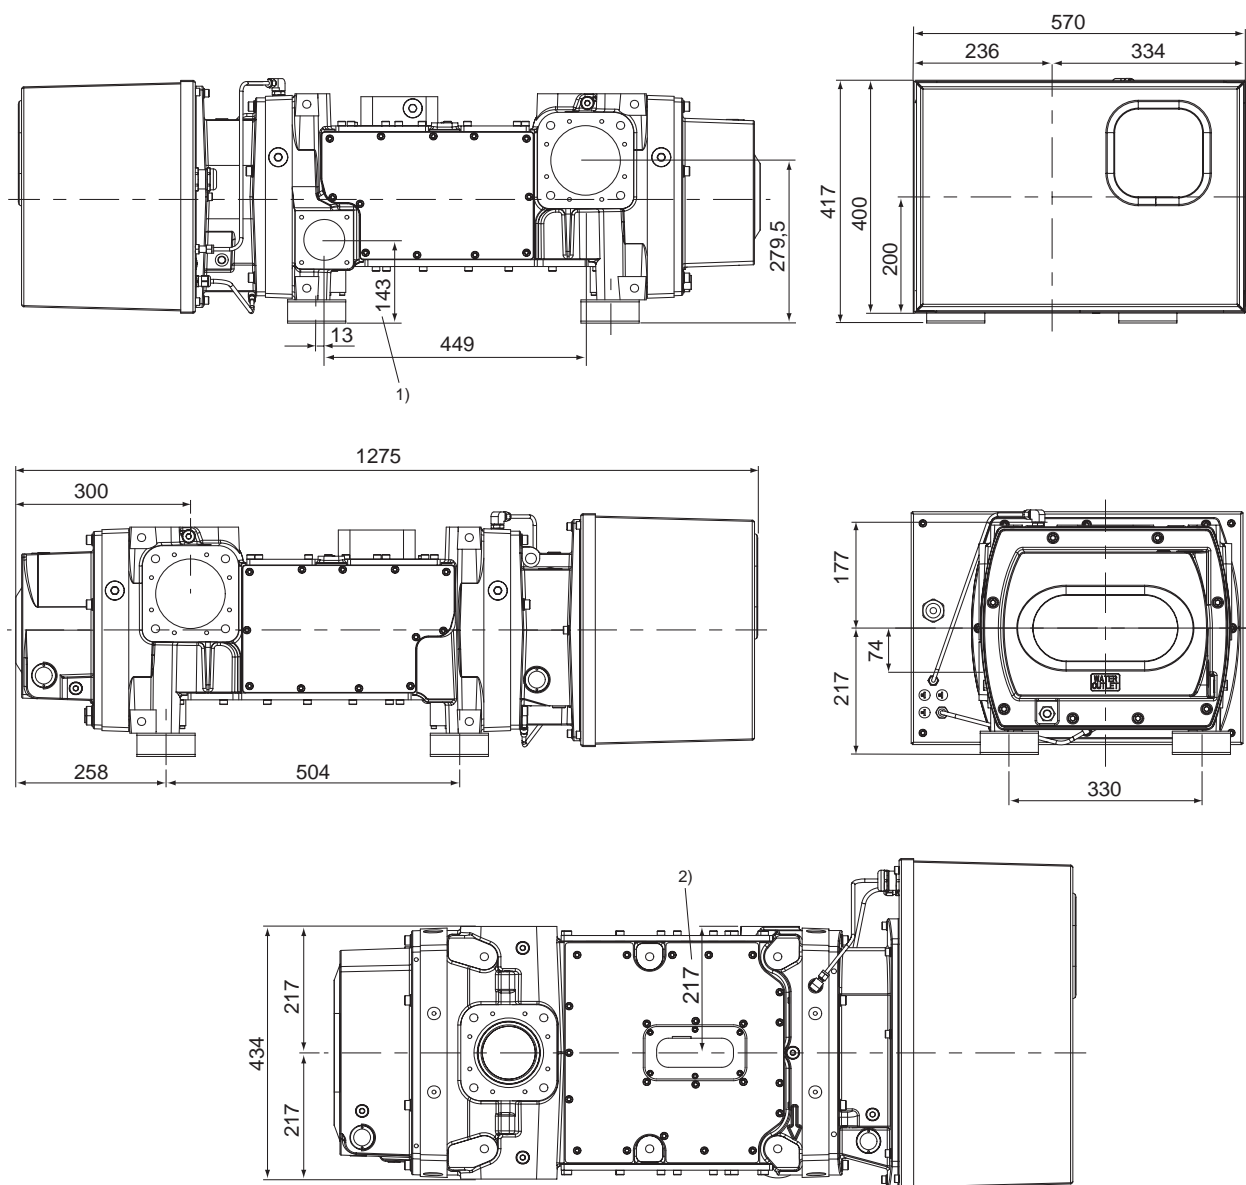


Dimensional drawing for the DRYVAC DV 450 and DV 650

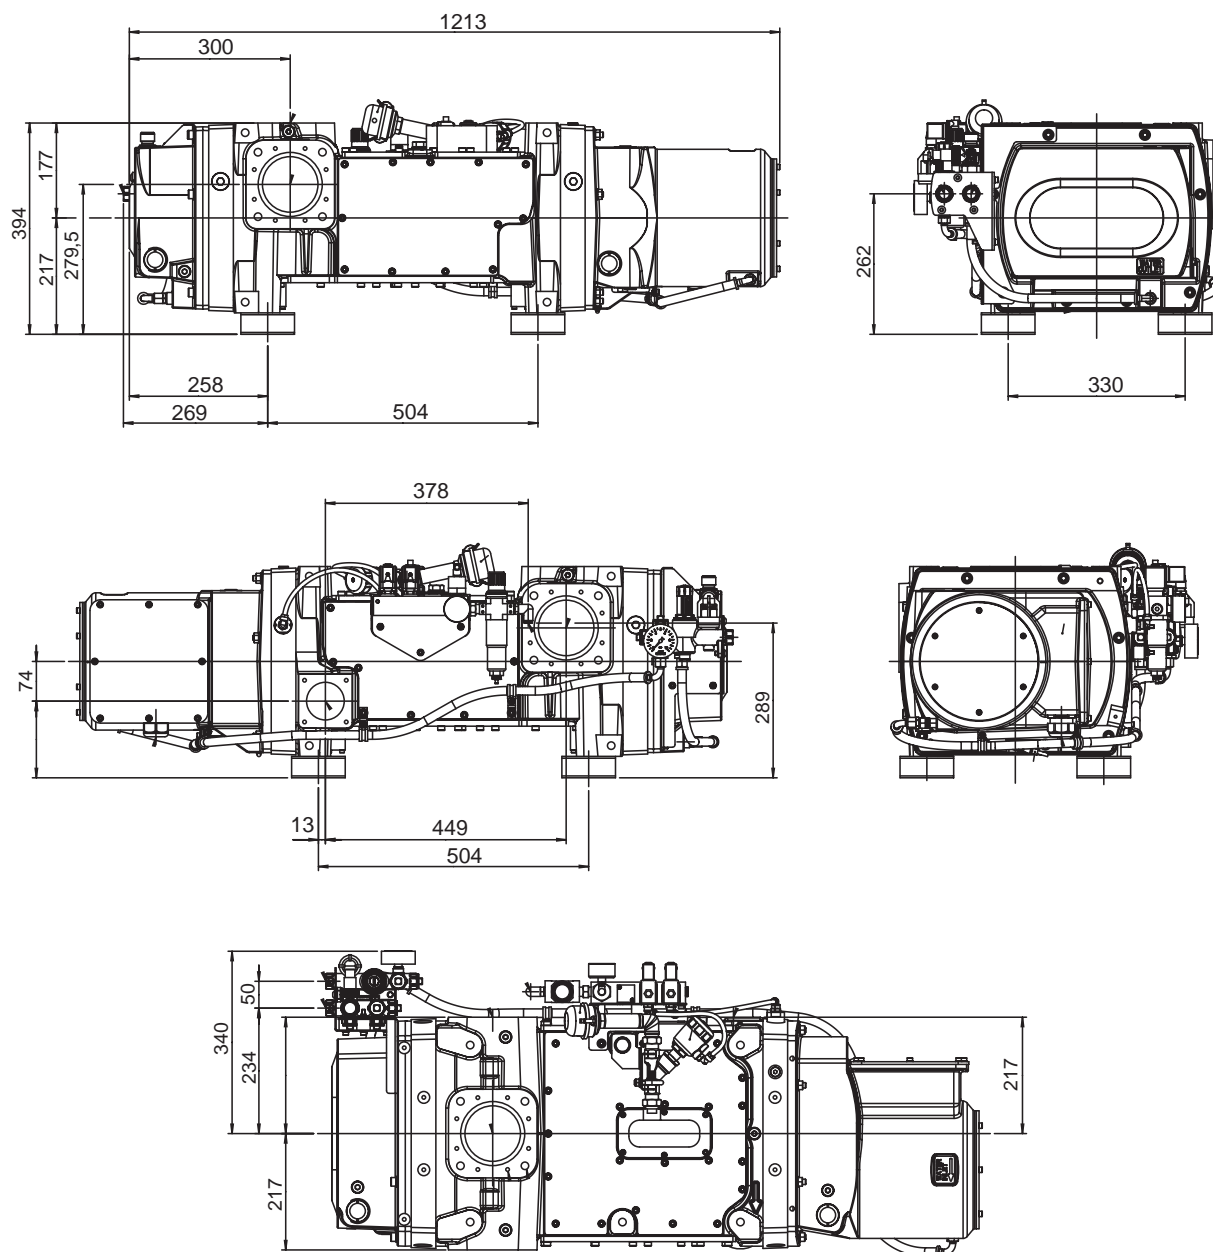


Dimensional drawing for the DRYVAC DV 450-r and DV 650-r

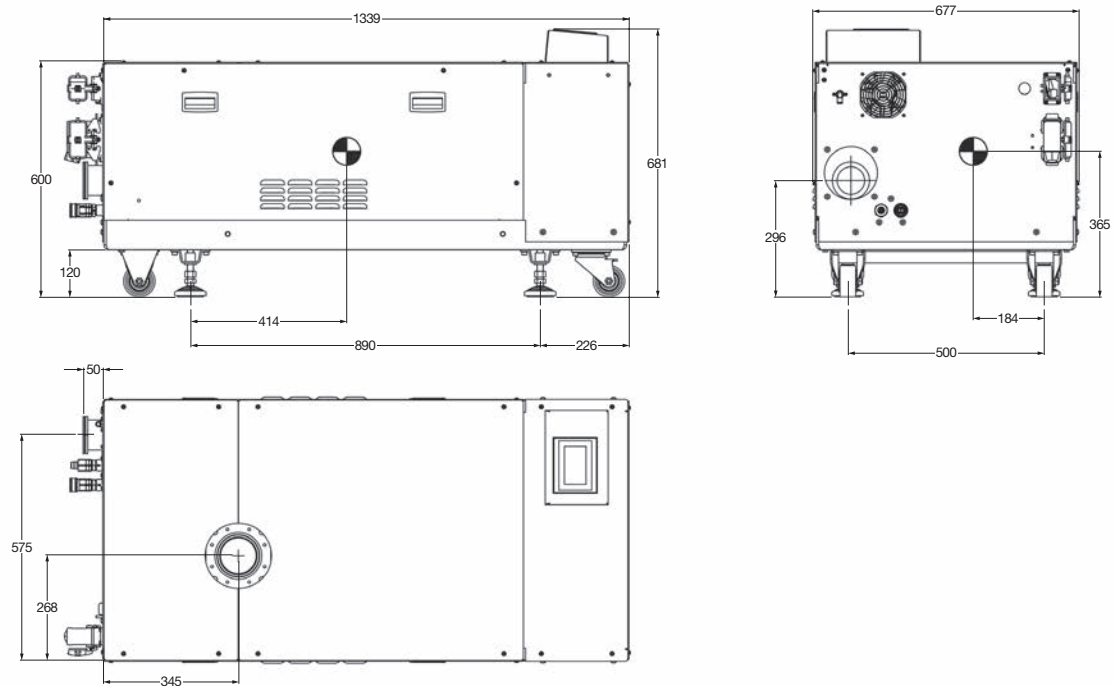




Dimensional drawing for the DRYVAC DV 450-i and DV 650-i

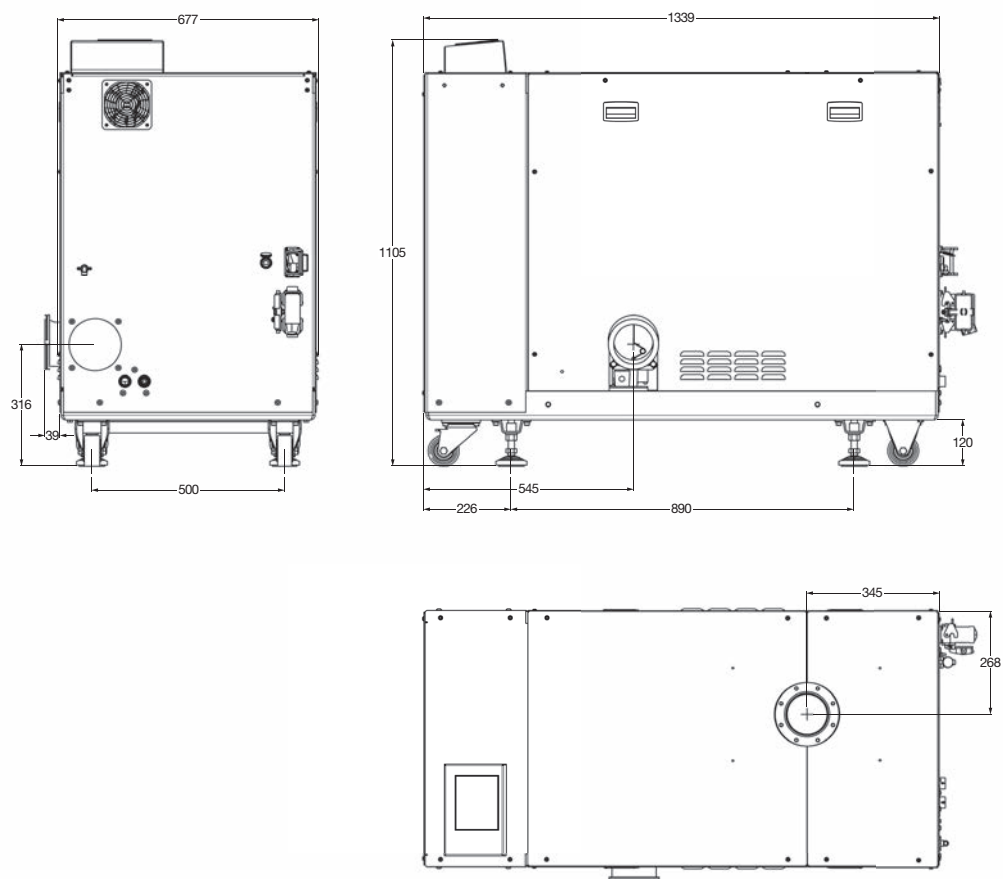

Dimensional drawing for the DRYVAC DV 1200 S-i

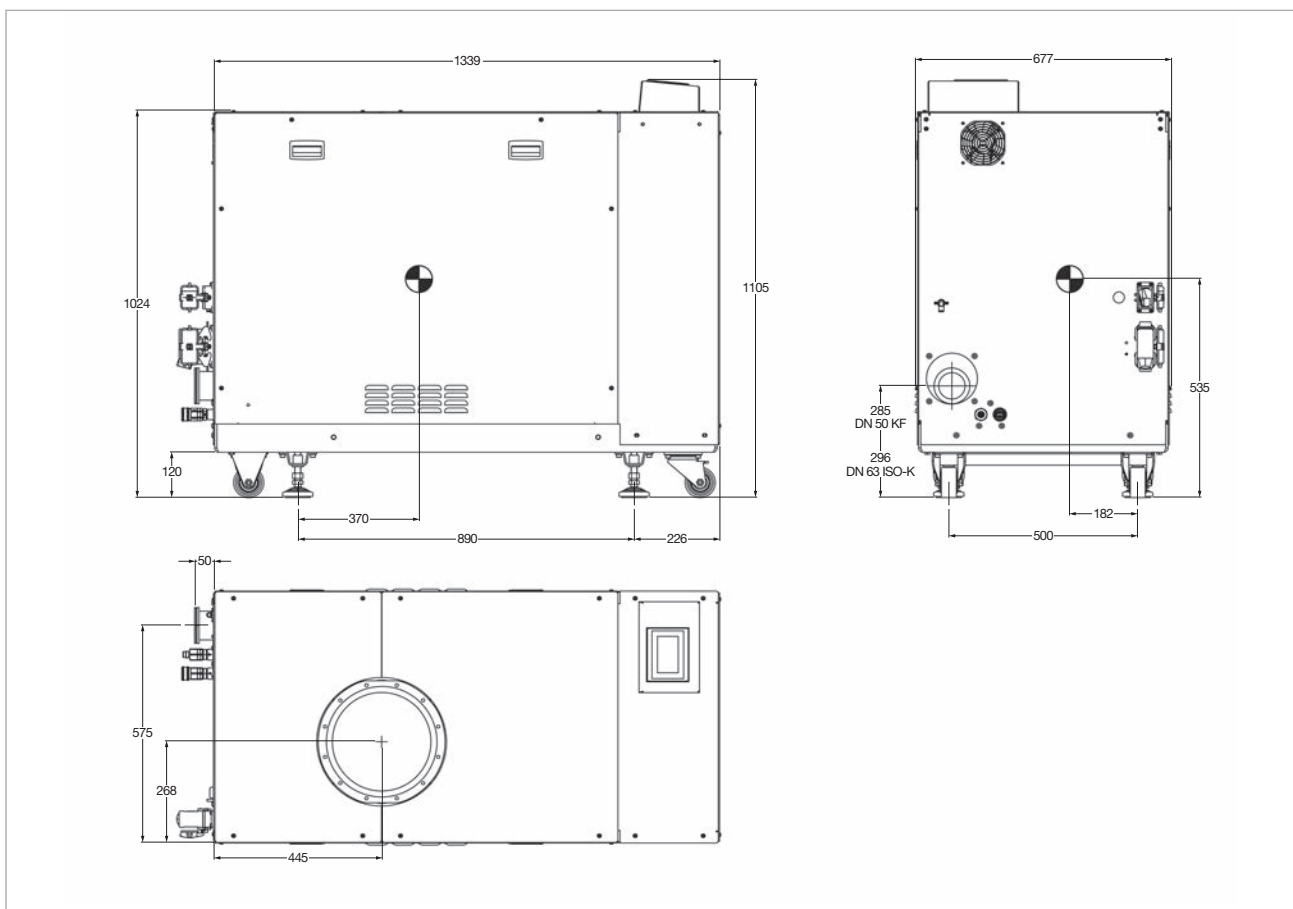


Dimensional drawing for the DRYVAC DVR 5000-i, 5000 C-i and 5000 S-i

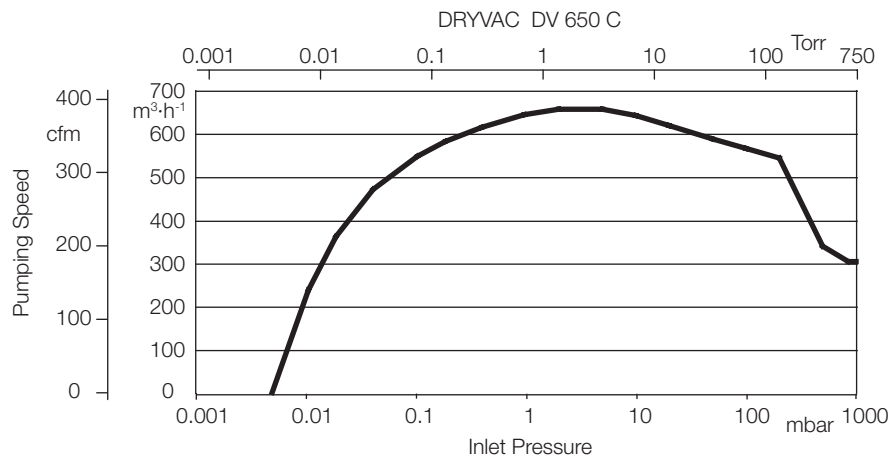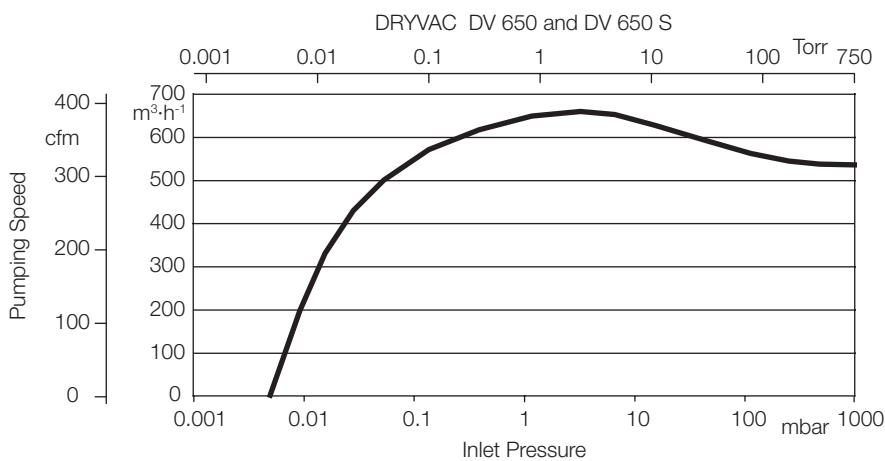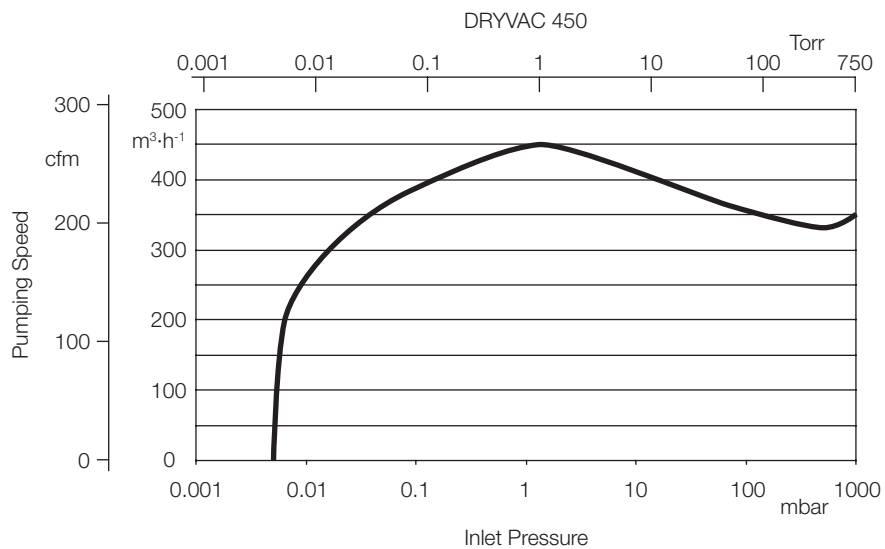


Pumping speed curves of the DRYVAC DV 450, DV 650 (S) and DRYVAC DV 650 C



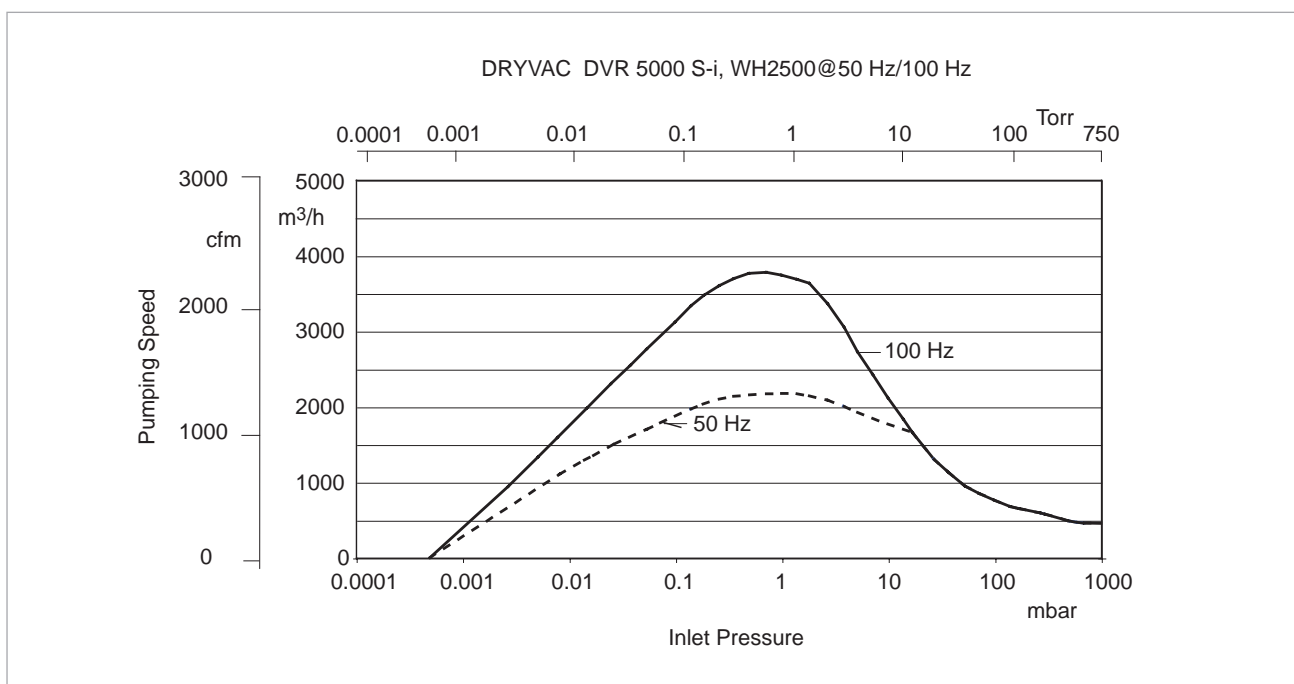

Pumping speed curves of the DRYVAC DVR 5000 S-i

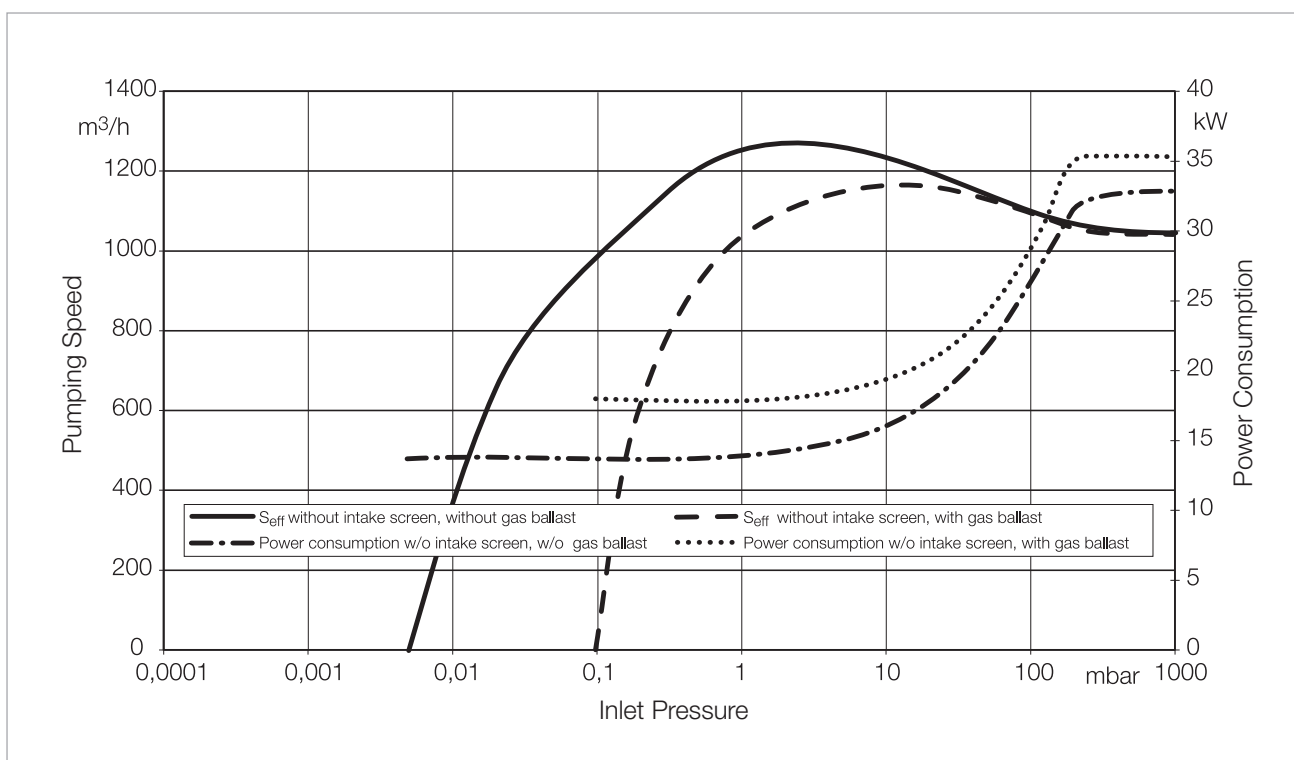

Pumping speed curves of the DRYVAC DV 1200 and DV 1200 S-i

## Technical Data

## DRYVAC DV / DV S / DV C

		450	650-i	650	650-r
Nominal pumping speed	m <sup>3</sup> /h (cfm)	450 (265)	650 (383)	650 (383)	650 (383)
Max. effective pumping speed	m <sup>3</sup> /h (cfm)	450 (265)	650 (383)	650 (383)	650 (383)
Ultimate pressure	mbar (Torr)	5 x 10 <sup>-3</sup> (4 x 10 <sup>-3</sup> )	5 x 10 <sup>-3</sup> (4 x 10 <sup>-3</sup> )	5 x 10 <sup>-3</sup> (4 x 10 <sup>-3</sup> )	5 x 10 <sup>-3</sup> (4 x 10 <sup>-3</sup> )
Permissible ambient temperature	°C (°F)	+5 to +50 (+41 to +122)	+5 to +40 (+41 to +104)	+5 to +50 (+41 to +122)	+5 to +50 (+41 to +122)
Water vapour tolerance with > 20 slm purge gas or gas ballast	mbar (Torr)	60 (45)	60 (45)	60 (45)	60 (45)
Water vapour capacity	kg/h	15	25	25	25
Noise level at ultimate pressure with silencer and exhaust line	dB(A)	67	65	67	67
with permanent exhaust line		65	65	65	65
Power consumption at ultimate pressure	kW	5.3	≤ 7	≤ 7	≤ 7
Cooling		water	water/air	water	water
Electrical connection		380-460 V, 50/60 Hz	380-460 V, 50/60 Hz	380-460 V, 50/60 Hz	380-460 V, 50/60 Hz
Phases		3-ph.	3-ph.	3-ph.	3-ph.
Nominal power at 400 V	kW	11	15	15	15
Nominal current at 400 V	A	24	31	31	31
Intake connection	DN	100 ISO-K PN6 (1x at the top, 2x at the side)	100 ISO-K	100 ISO-K PN6 (1x at the top, 2x at the side)	100 ISO-K PN6 (1x at the top, 2x at the side)
Exhaust side connection	DN	63 ISO-K	63 ISO-K	63 ISO-K	63 ISO-K
Protection class EN 60529	IP	54	20	54	55
Weight	kg (lbs)	620	750 (1654)	580 (1280)	540 (1192)
Dimensions (W x D x H)	mm (in.)	1280 x 570 x 420 (50.4 x 22.4 x 16.5)	1370 x 677 x 681 (52.8 x 26.7 x 26.8)	1280 x 570 x 420 (50.4 x 22.4 x 16.5)	1200 x 450 x 400 (47.2 x 17.7 x 15.7)
Cooling water connection Threads, female	G	1/2	1/2	1/2	1/2
Cooling water temperature with gear oil LEYBONOL LVO 210	°C (°F)	5 to 35 (41 to 95)	5 to 35 (41 to 95)	5 to 35 (41 to 95)	5 to 35 (41 to 95)
with gear oil LEYBONOL LVO 410	°C (°F)	5 to 25 (41 to 77)	5 to 25 (41 to 77)	5 to 25 (41 to 77)	5 to 25 (41 to 77)
Cooling water throughput, nominal	l/min (US gallon/min)	6 (1.6)	7.5 (2.0)	7.5 (2.0)	7.5 (2.0)
Purge gas connection (plugged connection)		D10	D10	D10	D10

## Technical Data

## DRYVAC DV / DV S / DV C

		1200-i	1200	DVR 5000-i
Nominal pumping speed	m <sup>3</sup> /h (cfm)	1250 (736)	1250 (736)	5000 (2945)
Max. effective pumping speed	m <sup>3</sup> /h (cfm)	1250 (736)	1250 (736)	3800 (2238)
Ultimate pressure (Torr)	mbar	5 x 10 <sup>-3</sup> (4 x 10 <sup>-3</sup> )	5 x 10 <sup>-3</sup> (4 x 10 <sup>-3</sup> )	5 x 10 <sup>-4</sup> (4 x 10 <sup>-4</sup> )
Permissible ambient temperature	°C (°F)	+5 to +40 (+41 to +104)	+5 to +50 (+41 to +122)	+5 to +40 (+41 to +104)
Water vapour tolerance with > 20 slm purge gas or gas ballast	mbar (Torr)			60 (45)
with > 40 slm purge gas or gas ballast	mbar (Torr)	60 (45)	60 (45)	
Water vapour capacity	kg/h	50	50	25
Noise level at ultimate pressure with silencer and exhaust line	dB(A)	65	67	67
with permanent exhaust line	dB(A)	65	65	67
Power consumption at ultimate pressure	kW	≤ 14	≤ 14	≤ 9.5
Cooling		water/air	water	water/air
Electrical connection		380-460 V, 50/60 Hz	380-460 V, 50/60 Hz	380-460 V, 50/60 Hz
Phases		3-ph.	3-ph.	3-ph.
Nominal power at 400 V	kW	30	30	21
Nominal current at 400 V	A	62	62	35
Intake connection	DN	100 ISO-K	100 ISO-K	250 ISO-K
Exhaust side connection	DN	100 ISO-K	100 ISO-K	63 ISO-K or 50 KF
Protection class EN 60529	IP	20	54	20
Weight	kg (lbs)	1400 (3091)	1400 (3091)	1200 (2646)
Dimensions (W x D x H)	mm (in.)	1370 x 677 x 1105 (53.9 x 26.7 x 43.5)	1370 x 677 x 1105 (53.9 x 26.7 x 43.5)	1370 x 677 x 1105 (53.9 x 26.7 x 43.5)
Cooling water connection Threads, female	G	1/2	1/2	1/2
Cooling water temperature with gear oil LEYBONOL LVO 210	°C (°F)	5 to 35 (41 to 95)	5 to 35 (41 to 95)	5 to 35 (41 to 95)
with gear oil LEYBONOL LVO 410	°C (°F)	5 to 25 (41 to 77)	5 to 25 (41 to 77)	5 to 25 (41 to 77)
Cooling water throughput, nominal	l/min (US gallon/min)	15.0 (4.0)	15.0 (4.0)	11.0 (2.9)
Purge gas connection (plugged connection)		D10	D10	D10

## Ordering Information

### DRYVAC DV / DV S / DV C

DRYVAC	PLC/Touch Screen/ Software	Frequency converter	Purge module	Gas ballast module (ambient air)	Housing and feet	Lubricant LEYBONOL	Part No.
<b>DV</b>							
450-r, 400 V	no	external (rack)	triple	none	rubber feet	LVO 210	<b>112045V07-1</b>
450, 400 V	no	on board	double	24 V valve	rubber feet	LVO 210	<b>112045V15-1</b>
450, 200 V	no	on board	double	24 V valve	rubber feet	LVO 210	<b>112045V19-1</b>
450-i, 400 V	yes	on board	triple	none	housing, castors, adjustable feet	LVO 210	<b>112045V50-1</b>
650-r, 400 V	no	external (rack)	double	24 V valve	rubber feet	LVO 210	<b>112065V05-1</b>
650-r, 200 V	no	external (rack)	double	24 V valve	rubber feet	LVO 210	<b>112065V19-1</b>
650, 400 V ATEX Cat. 2i	no	on board	double	24 V valve	rubber feet	LVO 210	<b>112065V11-1</b>
650, 400 V	no	on board	double	24 V valve	rubber feet	LVO 210	<b>112065V15-1</b>
650, 400 V	no	on board	triple	none	rubber feet	LVO 210	<b>112065V17-1</b>
650-i, 400 V	yes	on board	triple	none	housing, castors, adjustable feet	LVO 210	<b>112065V50-1</b>
1200, 400 V ATEX Cat. 2i	no	on board	double	24 V valve	housing, castors, adjustable feet	LVO 210	<b>112120V11-1</b>
1200, 400 V with Profibus	no	on board (2x)	double	24 V valve	housing, castors, adjustable feet	LVO 210	<b>112120V17-1</b>
1200-i, 400 V	yes	on board	triple	none	housing, castors, adjustable feet	LVO 210	<b>112120V50-1</b>
<b>DV S</b>							
450 S, 400 V	no	on board	single	none	rubber feet	LVO 210	<b>112045V09-1</b>
450 S, 400 V	no	on board	single	none	rubber feet	LVO 410	<b>112045V20-1</b>
450 S, 200 V	no	on board	single	none	rubber feet	LVO 410	<b>112045V29-1</b>
650 S, 400 V	no	on board	single	none	rubber feet	LVO 210	<b>112065V09-1</b>
650 S, 400 V	no	on board	single	none	rubber feet	LVO 410	<b>112065V20-1</b>
650 S-r, 400 V	no	external (rack)	double	none	rubber feet	LVO 410	<b>112065V23-1</b>
650 S-i, 400 V	yes	on board	triple	none	housing, castors, adjustable feet	LVO 410	<b>112065V40-1</b>
1200 S-i, 400 V	yes	on board	triple	none	housing, castors, adjustable feet	LVO 410	<b>112120V40-1</b>
<b>DV C</b>							
450 C, 400 V	no	on board	triple	none	rubber feet	LVO 410	<b>112045V30-1</b>
650 C, 400 V	no	on board	triple	none	rubber feet	LVO 410	<b>112065V30-1</b>
650 C-r, 200 V	no	external (rack)	triple	none	rubber feet	LVO 410	<b>112065V35-1</b>
650 C-r, 400 V with relay option board	no	external (rack)	triple	none	rubber feet	LVO 410	<b>112065V36-1</b>
650 C-i, 400 V	yes	on board	triple	none	housing, castors, adjustable feet	LVO 410	<b>112065V45-1</b>
<b>DVR</b>							
5000-i, 400 V	yes	on board	triple	none	housing, castors, adjustable feet	LVO 210	<b>112500V50-1</b>
5000 C-i, 400 V Exhaust connection DN 63 ISO-K	yes	on board	triple	none	housing, castors, adjustable feet	LVO 410	<b>112500V45-1</b>
5000 C-i, 400 V Exhaust connection DN 50 ISO-KF	yes	on board	triple	none	housing, castors, adjustable feet	LVO 410	<b>112500V60-1</b>
5000 S-i, 400 V	yes	on board	triple	none	housing, castors, adjustable feet	LVO 410	<b>112500V40-1</b>

## Ordering Information

### Accessories

	Part No.
Profibus module for DRYVAC DV / DV-r	<b>155212V</b>
ProfiNet module for DRYVAC DV / DV-r	<b>112005A35</b>
EtherCAT module for DRYVAC DV / DV-r	<b>112005A36</b>
Relay module (digital output) for DRYVAC DV / DV-r	<b>112005A01</b>
Ethernet interface board for DRYVAC DV / DV-r	<b>112005A02</b>
Interface kit 24 Volt I/O for DRYVAC DV / DV-r	<b>112005A22</b>
Adapter DRYVAC for	
RUVAC WH 700	<b>112005A03</b>
RUVAC WS(U) 1001	<b>112005A04</b>
RUVAC WS(U) 2001	<b>112005A05</b>
RUVAC WH(U) 2500	<b>112005A07</b>
RUVAC WH(U) 4400/7000	<b>112005A10</b>
Cooling water unit	
DRYVAC 450/650 S	<b>112005A12</b>
DRYVAC 450/650 S-r	<b>112005A13</b>
Non-return valve DRYVAC, DN 63 ISO-K <sup>1)</sup>	<b>112005A15</b>
Gas ballast kit DRYVAC, 24 V electro-pneumatic	<b>112005A17</b>
Silencer	
DN 63 ISO-K for DRYVAC DV 450/650 and SCREWLINE SP 250	<b>119002</b>
DN 100 ISO-K for DRYVAC 1200 and SCREWLINE SP 630	<b>119001</b>
Serviceable silencer	
DN 63 ISO-K for DRYVAC DV 450/650 and SCREWLINE SP 250	<b>119003V</b>
DN 100 ISO-K for DRYVAC 1200 and SCREWLINE SP 630	<b>119004V</b>
External display (only for 650, 650-r and 1200)	<b>155213V</b>
Harting plug DRYVAC S-i/C-i	<b>112005A20</b>
Set of nozzles for DRYVAC purge gas	<b>112005A30</b>
Permanent inlet purge kit	<b>112005A32</b>

<sup>1)</sup> Already integrated in all -i/C-i versions

# Sales and Service

## Germany

### Leybold GmbH

Sales, Service, Support Center (3SC)  
Bonner Strasse 498  
D-50968 Cologne  
T: +49-(0)221-347 1234  
F: +49-(0)221-347 31234  
sales@leybold.com  
www.leybold.com

### Leybold GmbH

#### Sales Area North

Branch Office Berlin  
Industriestrasse 10b  
D-12099 Berlin  
T: +49-(0)30-435 609 0  
F: +49-(0)30-435 609 10  
sales.bn@leybold.com

### Leybold GmbH

#### Sales Office South

Branch Office Munich  
Karl-Hammerschmidt-Strasse 34  
D-85609 Aschheim-Dornach  
T: +49-(0)89-357 33 9-10  
F: +49-(0)89-357 33 9-33  
sales.mn@leybold.com  
service.mn@leybold.com

### Leybold Dresden GmbH

#### Service Competence Center

Zur Wetterwarte 50, Haus 304  
D-01109 Dresden  
Service:  
T: +49-(0)351-88 55 00  
F: +49-(0)351-88 55 041  
info.dr@leybold.com

## Europe

### Belgium

### Leybold Nederland B.V.

#### Belgisch bijkantoor

Leuvensesteenweg 542-9A  
B-1930 Zaventem  
Sales:  
T: +32-2-711 00 83  
F: +32-2-720 83 38  
sales.zv@leybold.com  
Service:  
T: +32-2-711 00 82  
F: +32-2-720 83 38  
service.zv@leybold.com

### France

### Leybold France S.A.S.

Parc du Technopolis, Bâtiment Beta  
3, Avenue du Canada  
F-91940 Les Ulis cedex  
Sales and Service:  
T: +33-1-69 82 48 00  
F: +33-1-69 07 57 38  
info.ctb@leybold.com  
sales.ctb@leybold.com

### Leybold France S.A.S.

Valence Factory  
640, Rue A. Bergès  
B.P. 107  
F-26501 Bourg-lès-Valence Cedex  
T: +33-4-75 82 33 00  
F: +33-4-75 82 92 69  
marketing.vc@leybold.com

## Great Britain

### Leybold UK LTD.

Unit 9  
Silverglade Business Park  
Leatherhead Road  
Chessington  
Surrey (London)  
KT9 2QL  
Sales:  
T: +44-13-7273 7300  
F: +44-13-7273 7301  
sales.ln@leybold.com  
Service:  
T: +44-13-7273 7320  
F: +44-13-7273 7303  
service.ln@leybold.com

## Italy

### Leybold Italia S.r.l.

Via Trasimeno 8  
I-20128 Mailand  
Sales:  
T: +39-02-27 22 31  
F: +39-02-27 20 96 41  
sales.mi@leybold.com  
Service:  
T: +39-02-27 22 31  
F: +39-02-27 22 32 17  
service.mi@leybold.com

## Netherlands

### Leybold Nederland B.V.

Floridadreef 102  
NL-3565 AM Utrecht  
Sales and Service:  
T: +31-(30) 242 63 30  
F: +31-(30) 242 63 31  
sales.ut@leybold.com  
service.ut@leybold.com

## Switzerland

### Leybold Schweiz AG, Pfäffikon

Churerstrasse 120  
CH-8808 Pfäffikon  
Warehouse and shipping address:  
Riedthofstrasse 214  
CH-8105 Regensdorf  
Sales:  
T: +41-44-308 40 50  
F: +41-44-302 43 73  
sales.zh@leybold.com  
Service:  
T: +41-44-308 40 62  
F: +41-44-308 40 60  
service.zh@leybold.com

## Spain

### Leybold Hispánica, S.A.

C/. Huelva, 7  
E-08940 Cornellá de Llobregat  
(Barcelona)  
Sales:  
T: +34-93-666 43 11  
F: +34-93-666 43 70  
sales.ba@leybold.com  
Service:  
T: +34-93-666 46 11  
F: +34-93-685 43 70  
service.ba@leybold.com

## America

### USA

### Leybold USA Inc.

5700 Mellon Road  
USA-Export, PA 15632  
T: +1-724-327-5700  
F: +1-724-325-3577  
info.ex@leybold.com  
Sales:  
T: +1-724-327-5700  
F: +1-724-333-1217  
Service:  
T: +1-724-327-5700  
F: +1-724-325-3577

## Brazil

### Leybold do Brasil

Rod. Vice-Prefeito Hermenegildo Tonolli,  
nº. 4413 - 6B  
Distrito Industrial  
Jundiá - SP  
CEP 13.213-086  
Sales and Service:  
T: +55 11 3395 3180  
F: +55 11 99467 5934  
sales.ju@leybold.com  
service.ju@leybold.com

## Asia

### P. R. China

### Leybold (Tianjin)

#### International Trade Co. Ltd.

Beichen Economic  
Development Area (BEDA),  
No. 8 Western Shuangchen Road  
Tianjin 300400  
China  
Sales and Service:  
T: +86-22-2697 0808  
F: +86-22-2697 4061  
F: +86-22-2697 2017  
sales.tj@leybold.com  
service.tj@leybold.com

## India

### Leybold India Pvt Ltd.

No. 82(P), 4th Phase  
K.I.A.D.B. Plot  
Bommasandra Industrial Area  
Bangalore - 560 099  
Indien  
Sales and Service:  
T: +91-80-2783 9925  
F: +91-80-2783 9926  
sales.bgl@leybold.com  
service.bgl@leybold.com

## Japan

### Leybold Japan Co., Ltd.

Headquarters  
Shin-Yokohama A.K.Bldg., 4th floor  
3-23-3, Shin-Yokohama  
Kohoku-ku, Yokohama-shi  
Kanagawa-ken 222-0033  
Japan  
Sales:  
T: +81-45-471-3330  
F: +81-45-471-3323  
sales.yh@leybold.com

### Leybold Japan Co., Ltd.

Tsukuba Technical Service Center  
1959, Kami-yokoba  
Tsukuba-shi, Ibaraki-shi 305-0854  
Japan  
Service:  
T: +81-29 839 5480  
F: +81-29 839 5485  
service.iik@leybold.com

## Malaysia

### Leybold Malaysia

#### Leybold Singapore Pte Ltd.

No. 1 Jalan Hi-Tech 2/6  
Kulim Hi-Tech Park  
Kulim, Kedah Darul  
Aman 09000  
Malaysia  
Sales and Service:  
T: +604 4020 222  
F: +604 4020 221  
sales.ku@leybold.com  
service.ku@leybold.com

## South Korea

### Leybold Korea Ltd.

3F. Jellzone 2 Tower  
Jeongja-dong 159-4  
Bundang-gu Sungnam-si  
Gyeonggi-do  
Bundang 463-384, Korea  
Sales:  
T: +82-31 785 1367  
F: +82-31 785 1359  
sales.bd@leybold.com  
Service:  
623-7, Ulsung-Dong  
Cheonan-Si  
Chungcheongnam-Do  
Korea 330-290  
T: +82-41 589 3035  
F: +82-41 588 0166  
service.cn@leybold.com

## Singapore

### Leybold Singapore Pte Ltd.

8 Commonwealth Lane #01-01  
Singapore 149555  
Singapore  
Sales and Service:  
T: +65-6303 7030  
F: +65-6773 0039  
sales.sg@leybold.com  
service.sg@leybold.com

## Taiwan

### Leybold Taiwan Ltd.

No 416-1, Sec. 3  
Chunghsin Rd., Chutung  
Hsinchu County 310  
Taiwan, R.O.C.  
Sales and Service:  
T: +886-3-500 1688  
F: +886-3-583 3999  
sales.hc@leybold.com  
service.hc@leybold.com

## Headquarter

### Leybold GmbH

Bonner Strasse 498  
D-50968 Cologne  
T: +49-(0)221-347-0  
F: +49-(0)221-347-1250  
info@leybold.com

